

The Solution Is Our Adhesive Technology

FG 8236M is a unique, pressure-sensitive tape that incorporates a proprietary adhesive developed by Avery Dennison. Using ordinary tap water and soap to activate the adhesive, a permanent bond attaches the golf grip to the shaft. FG 8236 M is every bit as effective as solvent-based tapes. But it's safer, easier-to-use and there's no need for complicated mixing or chemical storage procedures.


Six Easy Steps for Applying Avery Dennison™ FG 8236M*



1. Prepare a solution of 30 parts warm tap water with 1 part liquid detergent or baby shampoo.



2. Place the sticky (non-linered) side of tape lengthwise on the shaft with approximately 1/4" tape extending over the end of the shaft.

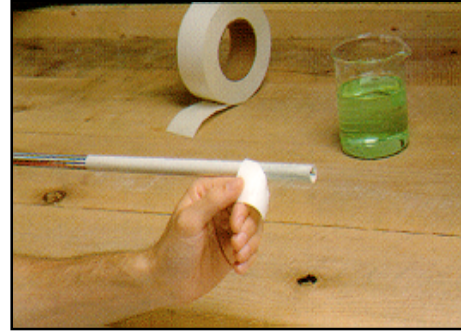

3. Remove the paper release liner and smooth tape around shaft; tuck excess tape into the shaft opening.



4. Pour the water/soap solution into the grip, approximately 3/4 full, while blocking the small hole at the end so solution does not flow out.



5. Pour the water/soap solution out of the grip and over the tape-covered shaft. Be sure to moisten all of the tape, spreading the solution by hand if necessary.



6. Place the grip's opening onto the shaft and slide the grip all the way into position on the shaft. Do not block the small hole at the end of the grip. Make sure the grip is properly aligned with the head of the golf club. Wipe off any excess adhesive and water. The club will be ready for use within four hours.

* Application method may vary depending upon grip type and production.