2020

WishonGolf

WISHONGOLF.COM

@wishongolf

@wishongolf

@wishongolf

@wishongolfvideo

When golfers think about the majority of golf club design innovations being marketed today - such as adjustable hosel drivers, milled faces on wedges, draw bias weighting, high COR fairway woods, high COR hybrids, and high COR irons - they tend to think of the large golf club companies. In fact, every one of these design innovations were first created by Wishon Golf's founder, Tom Wishon.

Wishon Golf is a completely unique brand in the golf equipment industry. Not only does Wishon lead the industry in original clubhead design innovation but it is also the leader in clubfitting research.

Through numerous books and publications, Wishon Golf has taught the golf equipment industry the most truthful information about the technical performance of golf clubs and the knowledge of choosing the right fitting specifications for every type of golfer than all of the other golf companies combined.

If you are interested in learning the most you can about golf club performance and building the absolute best performing golf clubs for every golfer, Wishon Golf welcomes you to support us with your purchases, to join with us in a combined promotional effort to prove the real benefits of professional clubfitting for golfers worldwide.

WishonGolf

YOUR FIT MATTERS

BOOKS 6
SHAFTLOCK CONNECTOR SYSTEM 10

DRIVERS & FAIRWAYS
519SHPR DRIVERS 16
919THI DRIVERS 18
919FD FAIRWAY DRIVER 21
929HS FAIRWAY WOODS 22
365PF FAIRWAY WOODS 24

EQ1-NX SINGLE LENGTH
EQ1-NX FAIRWAY WOODS 28
EQ1-NX HYBRIDS 30
EQ1-NX SINGLE LENGTH IRONS 32

IRONS & HYBRIDS
318RS HYBRID IRONS 34
775HS HYBRID IRONS 36
DI595 DRIVING IRONS 38
989CLA IRONS 40
979SS IRONS 42
771CSI IRONS 44
575MMC FORGED IRONS 46
565MC FORGED IRONS 48

WEDGES & PUTTERS
PCF MICRO PRO WEDGES 50
MICRO-GROOVE HM WEDGES 52
PCF WIDE SOLE WEDGE 55
CAVITY BLACK PUTTERS 60

SETS
730CL SET 56
FUTURE PRO JUNIOR SET 58

SHAFTS
S2S SHAFT FITTING SYSTEM 64
S2S GREEN 66
S2S RUBY LITE 67
S2S BLACK 68
S2S WHITE 70
S2S RED 72
S2S BLUE 74
S2S SMOOTH STEEL 76
S2S SUPERLITE STEEL 77
WEDGE SHAFTS 55
PUTTER SHAFTS 62
SHAFT TRIM CHARTS 78

GRIPS 80
GOLF BAGS 81
HEADCOVERS 82
ACCESSORIES 83
APPAREL 84
TOOLS, FERRULES, MEDALLIONS & LABELS 86

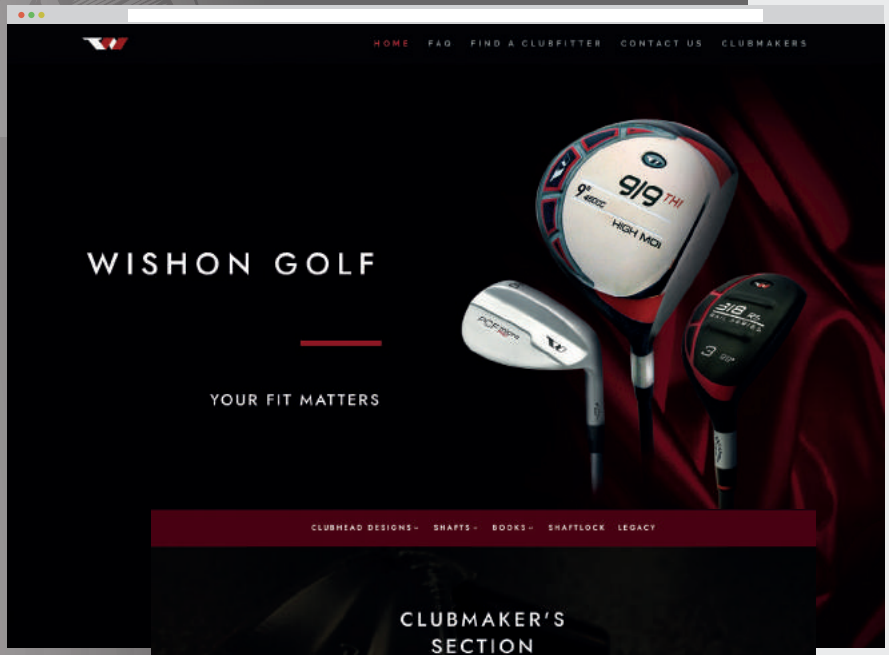

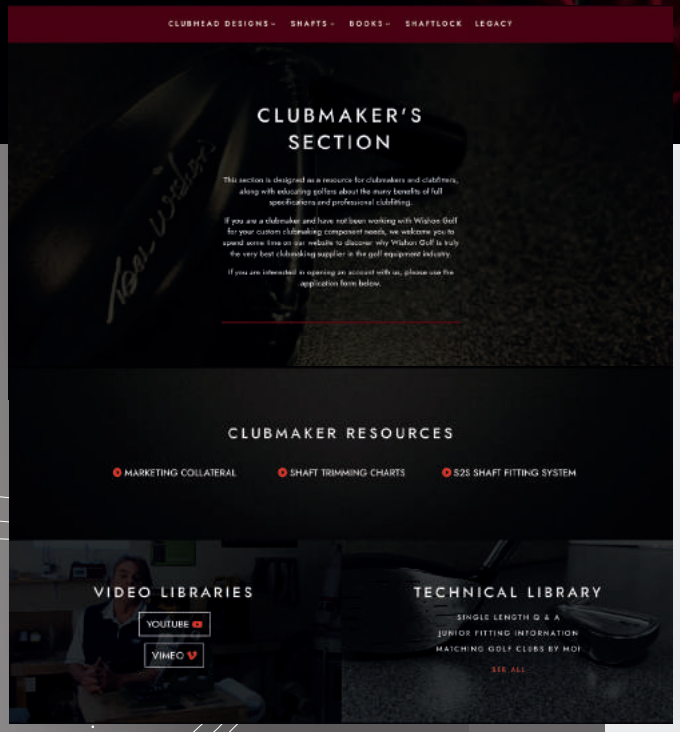

ONLINE

Wishon's new website retains all the features of the old Wishon website, but with a new and improved navigation to make it easier for both clubmaker and consumer to find what they're looking for.

Wishon's homepage now caters for the golfer who knows little about Wishon Golf and the clubfitting process, making this education a pertinent feature left, right and centre.

CLUBMAKERS

The revamped Clubmaker Section contains all the resources you will need to promote Wishon Golf and the benefits of clubfitting.

COMMENTS SECTION

Wishon's popular comment section is new and improved, and retains the opportunity for clubmakers to discuss Wishon products and ask technical questions.

TECHNICAL LIBRARY

A library of all the articles, blogs and online content Tom has written over the years with much of it revised for 2020.

DESIGN FIRSTS

This section collects all of Wishon's product design firsts, arranged chronologically by type.

VIDEO LIBRARIES

Wishon's video libraries on Wishon and Youtube can be embedded in your website and re-shared across your social media channels.

@WISHONGOLF /WISHONGOLF

/WISHONGOLF /WISHONGOLFVIDEO

WISHON CLUBFITTING MINI-FLYER

100 x FLYERS, PLUS 2 x FOLD OUT POSTERS
#TW155-MF-100

NEW FOR 2020

A mini-flyer ideal for handing out to would-be customers, promoting the Wishon brand and the Clubfitting process and your business.

This promotional material folds out from an oversized credit card size to a double-sided 18-panel sheet of paper, featuring the entire Wishon range on one side and an overview of clubfitting the 'Wishon Way' on the other.

Sold in quantities of 100 units, each mini-flyer has a blank back cover for you to attach/ add your clubmaker contact details.

Included with each pack are two larger poster size versions of each side of the flyer.

THE NEW 12 MYTHS THAT COULD WRECK YOUR GOLF GAME

PAPERBACK
#TW130-MINISEARCH

The New 12 Myths That Could Wreck Your Golf Game is an inexpensive, 32-page booklet written by Tom Wishon to educate golfers about the benefits of professional clubfitting. The New 12 Myths dispels of myths about golf clubs that golfers are led to believe from marketing claims and provides compelling information to convince golfers of the benefits of custom fitting.

Keep a supply on hand with your contact information attached to give away to all the golfers you can - local charity tournament giveaways, service groups, golf leagues, any organization with golfers. The more copies of The New 12 Myths you give away, the more your business will grow!

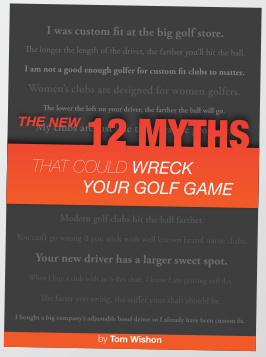

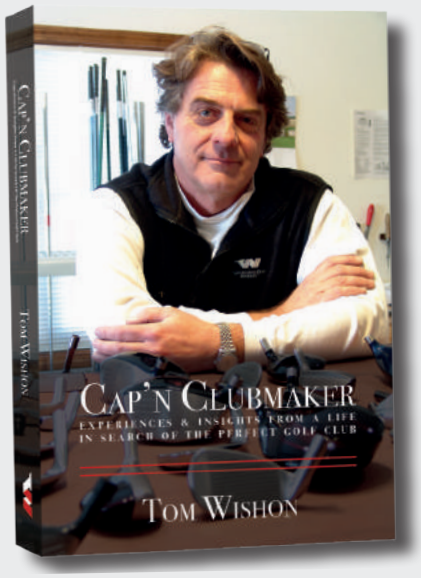

NEW FOR 2020

CAP'N CLUBMAKER:

EXPERIENCES & INSIGHTS FROM A LIFE IN SEARCH OF THE PERFECT GOLF CLUB

PAPERBACK, 338 PAGES
#TWCCM

In his eleventh book, Tom Wishon looks over his career within the golf equipment industry, spanning nearly 50 years. Written in two distinctly different parts, the first sees Wishon share many fascinating, remarkable and often humorous personal experiences from years of working and travelling the world designing and researching golf clubs.

Wishon concludes the book in part 2 by revealing his insights about the design and performance of golf clubs learnt over many decades of hands on work creating more original golf club designs and performing more performance research than perhaps any person in the history of the game.

Chapters include stories of his experiences from professional associations and friendships with Harvey Penick, Payne Stewart, Larry Nelson, Arnold Palmer, numerous other tour pros, as well as the people and the factories engaged in the production of all the different parts of a golf club. From "The Car Antenna and the British Open Winner", "Teaching Tech to the King", "Coming This Close to Meeting Ben Hogan", "How to Trade a Rolex for a Robot", "Fitting a Past and Future President on the Same Day", The Greatest Putter Harvey Ever Knew (which wasn't Ben Crenshaw!) and many others, Wishon's stories of his experiences are but a small testimony to an incredibly interesting and fascinating career in golf equipment.

BOOKS

COMMON SENSE CLUBFITTING

PAPERBACK, 496 PAGES
#TWCSC

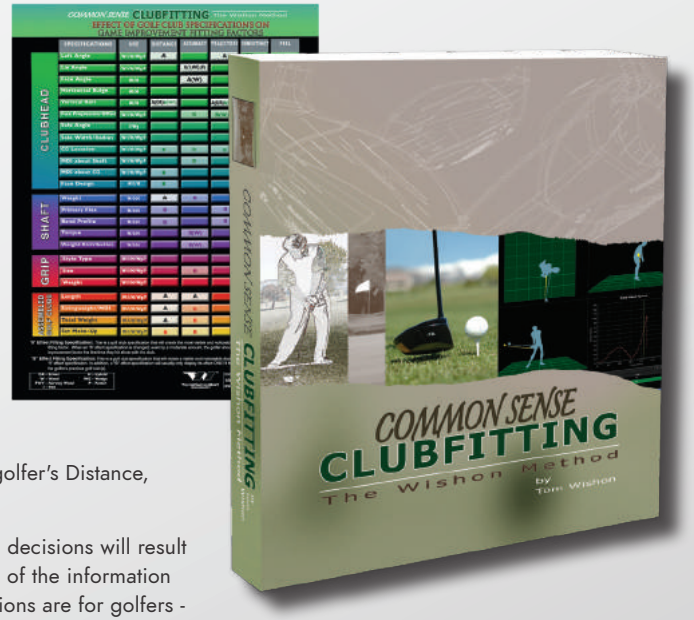

Wishon Golf's knowledge and experience in clubfitting technology and golf club performance is available to all clubmakers in this book, Common Sense Clubfitting: The Wishon Method.

Nowhere in the golf industry will you find the depth of technical information on clubfitting technology than in Common Sense Clubfitting. If you are serious about being the best clubfitter you can be, if you wish to ensure the highest level of success in your clubfitting, this book must become the primary focus of your study.

Common Sense Clubfitting teaches clubmakers which golf club specifications to focus on and exactly how to achieve the greatest level of visible shotmaking improvement for all golfer's Distance, Accuracy, Consistency, Shot Trajectory and Club Feel for ALL the clubs in the bag.

This book will end the confusion suffered by many clubmakers who are unsure which fitting decisions will result in the most tangible game improvement for golfers. Of special note is the fact that so much of the information in the book is keyed to teaching what specific characteristics dictate which fitting specifications are for golfers - of all abilities and all different swing types.

Tom Wishon wrote the following books to promote clubfitting and to convince golfers to find a clubfitter for their next purchase...

Each of these books is written in a very easy to understand manner, in a conversational tone that is virtually the same as having Tom Wishon sitting down with the reader to have a casual conversation about golf clubs.

Plain and simple, the more golfers who read one or more of these books, the more golfers who will find a clubmaker to be custom fit and buy custom built golf clubs. Wishon Golf also recommends each clubmaker read these books as well - when you do, you will have a much easier time talking to your golfers about the facts of life about golf equipment. From that comes more business for your clubmaking shop.

The Search books have been endorsed by an impressive list of people in the game:

- The legendary Arnold Palmer
- LPGA Hall of Fame member Carol Mann
- Top Ten Teacher to tour pros, Chuck Cook
- Top Twenty PGA Tour Career Money Leader Scott Verplank
- Golf Digest Equpment Editor Mike Stachura
- Golf World Equipment Editor Mike Johnson
- Golfweek Senior Editor Jim Achenbach

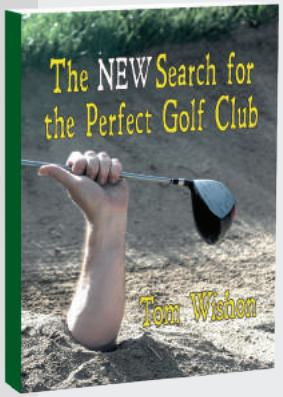

THE NEW SEARCH FOR THE PERFECT GOLF CLUB

PAPERBACK
#TWSPGC-PB

The first in the 'Search' series. The Search for the Perfect Golf Club has qualified as a best seller and was the winner of a past Book of the Year award from the prestigious International Network of Golf. The book shatters countless myths to deliver the full facts about all areas of golf club performance in an often humorous and very understandable manner. If you want to know facts about how golf clubs work, this book is a must read.

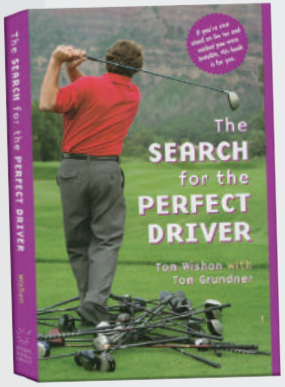

THE SEARCH FOR THE PERFECT DRIVER

HARDBACK WITH DUST JACKET
#TWSPD

Second in the 'Search' series, The Search for the Perfect Driver' explains everything any golfer wants to know about the performance and fitting of the longest and often times, the most frustrating club in the golfer's bag. The book is written in a full conversational dialog style between Tom and two golfers of different abilities. Winner of a past Book of the Year award from the International Network of Golf.

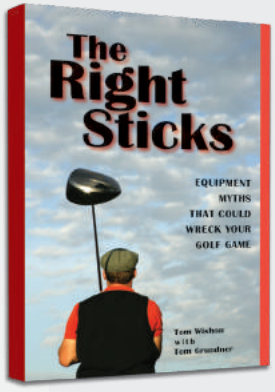

THE RIGHT STICKS

HARDBACK WITH DUST JACKET
#TWSTICKS

The Right Sticks is an expanded version of the 12 Myths booklet, setting the facts straight about nearly 40 different myths related to golf club, clubheads, shafts, their design and performance. With each myth explanation covering no more than 4-5 pages, The Right Sticks is a very easy to read book in which the reader can jump around and is not compelled to read in sequence to learn more about the performance of golf clubs.

HAND SELECT SERVICES

Attract more business by offering perfect Loft, Lie and Face Angle specifications on the Wishon Custom Golf Clubs you fit and build through our Hand Select and Custom Bending Services...

- All Wishon clubhead models are eligible for Hand Select Service for loft, lie, face angle (drivers/woods/hybrids) and loft, lie (irons, wedges) within +/-1° of each of these three specifications
- Wishon Golf Bending Service is available for most Wishon clubhead designs (see chart opposite for actual bending limits for each eligible clubhead model). A hosel boring service is also available for selected clubheads
- Each Hand Select clubhead is shipped with a signed verification certificate to ensure each specification measurement. Accuracy is within 1/4° of the requested specifications
- Bending on drivers/woods/hybrids is for lie and face angle; not loft. Custom loft requests for drivers/wood/hybrids are done by hand selecting from our inventory to find the requested loft spec within +/-1° of each model's loft design specifications
- All loft, lie and face angle specifications for drivers/woods/hybrids are measured with the clubhead SOLED in the same precision golf club specification gauge used by every clubhead production factory in the golf industry
- Charge for Hand Select Service is a flat fee per head for any number of Hand Select specifications requests on each head
- Charge for Hand Select Service for headweight is per head. Please note the +/- weight tolerances for each head model on its model presentation page in the catalog found under the headweight column in the specifications chart for each model
- Charge for Custom Bending is per head for any number of bends requested on the head
- Hand Select for weight service is also available on all clubheads

WishonGolf **Hand Select Service Notice** Model: TW 929 #4

Sales order #: 02838

Thank you very much for choosing Tom Wishon Golf Technology to meet your need for precise custom clubmaking specifications. We are pleased to be able to carefully hand-measure your request, and provide you with the most accurate components for the fitting and performance needs of your customer.

Hand Select Requirement: 16.5 Lyt - SQ ex - 2deg flat

Notes:

Specification: Loft — Verified to be: 16½°

Specification: Face Angle — Verified to be: SQ.

Specification: Lie — Verified to be: 56½°

Hand Select Performed by: dh

Each Wishon Hand Select clubhead includes a signed certificate of accuracy. Show and give the Wishon Hand Select verification sheet to your customers to prove the precision and accuracy of the custom fit Wishon Golf clubs you fit and build.

Below are the hand select specification ranges for each Wishon Golf clubhead model for lie angle, loft and for face angle...

	LIE	LOFT	FACE ANGLE
519SHPR DRIVERS	+/- 4°	+/- 1° by Hand Select	+/- 4°
919THI DRIVERS	+/- 4°	+/- 1° by Hand Select	+/- 4°
730CL DRIVER	+/- 4°	+/- 1° by Hand Select	+/- 4°
919F/D FWY DRIVER	+/- 4°	+/- 1° by Hand Select	+/- 4°
929HS FWY WOODS	+/- 4°	+/- 1° by Hand Select	+/- 4°
730CL FWY WOODS	+/- 2°	+/- 1° by Hand Select	+/- 2°
365PF FWY WOODS	+/- 2°	+/- 1° by Hand Select	+/- 2°
730CL HYBRIDS	+/- 2°	+/- 1° by Hand Select	+/- 2°
EQ1-NX FAIRWAY WOODS	+/- 2°	+/- 1° by Hand Select	+/- 2°
EQ1-NX HYBRIDS	+/- 3°	+/- 1° by Hand Select	+/- 3°
EQ1-NX SINGLE LENGTH IRONS	+/- 4°	+/- 4° By Bending	N/A
318RS HYBRIDS	+/- 2°	+/- 1° by Hand Select	+/- 2°
775HS HYBRIDS	+/- 4°	+/- 1° by Hand Select	+/- 4°
DI595 DRIVING IRONS	+/- 2°	+/- 2° By Bending	N/A
989CLA IRONS	+/- 3°	+/- 3° By Bending	N/A
979SS IRONS	+/- 2°	+/- 2° By Bending	N/A
771CSI IRONS	+/- 4°	+/- 4° By Bending	N/A
575MMC IRONS	+/- 4°	+/- 4° By Bending	N/A
565MC IRONS	+/- 4°	+/- 4° By Bending	N/A
FUTURE PRO JR WOODS	N/A	N/A	N/A
FUTURE PRO JR IRONS	+/- 2°	+/- 2° By Bending	N/A
PCF WEDGES	+/- 4°	+/- 4° By Bending	N/A
HM SERIES WEDGES	+/- 4°	+/- 4° By Bending	N/A
CAVITY BLACK PUTTERS (MODELS 1,2,4)	+/- 2°	+/- 2° By Bending	N/A

Note: All +/- degree ranges for custom spec options are in relation to each model's design specs for its loft, lie and face angle as listed on each models' catalog pages

The SHAFTLOCK Connector System is a shaft to clubhead connector system: a fast and simple tool for testing different shaft and clubhead combinations during your fitting sessions.

Wishon Golf has taken the original Spiralock/YourFit connector system and created an improved and streamlined version. With full depth penetration to the bottom of the bore, the Shaftlock connector system ensures your test shaft is inserted as it would be conventionally built.

SHAFTLOCK

CONNECTOR SYSTEM

A SHAFT TO CLUBHEAD CONNECTOR SYSTEM

FOR FASTER, SIMPLER SHAFT AND CLUBHEAD COMBINATIONS DURING FITTING SESSIONS...

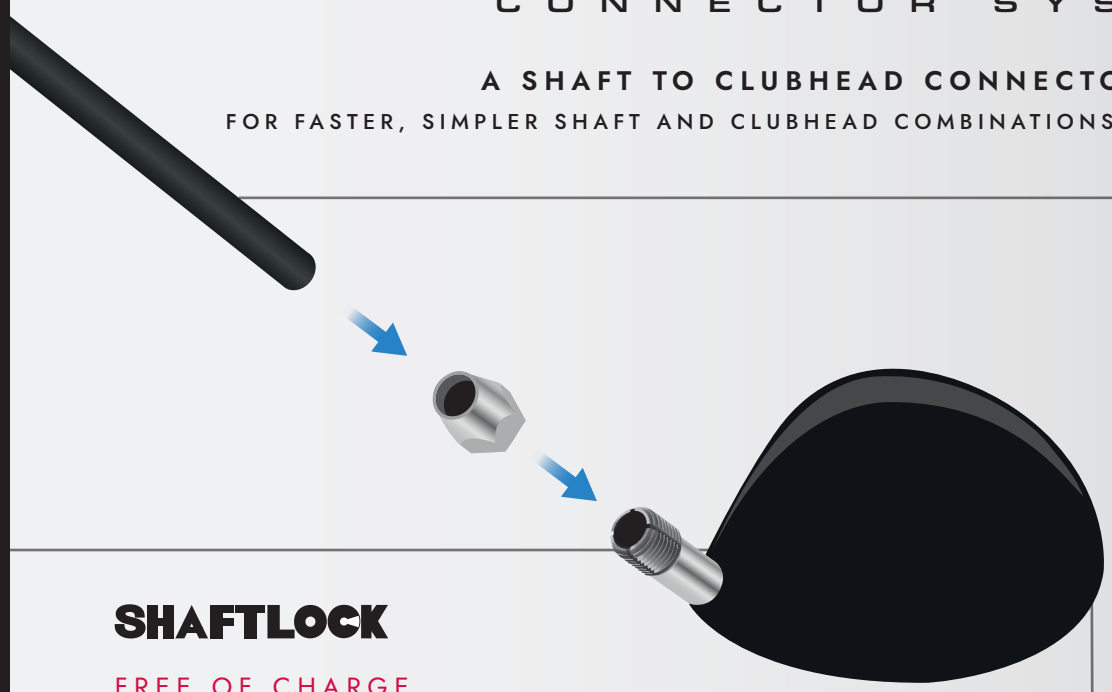

SHAFTLOCK

FREE OF CHARGE
INSTALLATION SERVICE

As part of the service to help Wishon clubmakers provide a full Wishon demo set-up, we are offering **FREE** of charge installation of the SHAFTLOCK connector to any head ordered as a demo.

Furthermore, demo heads will receive a 20% discount from the list price. PLUS – for each demo head ordered we'll also discount one shaft and grip per demo head ordered by 20%.

Clubmakers may fit their own SHAFTLOCK connectors but we do advise that great care is taken in doing so. Full instructions are provided with each SHAFTLOCK connector and we **strongly advise that clubmakers follow these instructions.**

- The SHAFTLOCK system will work with all Wishon Golf Drivers, Fairways, Hybrids and Irons
- Shafts used do not need a separate connector installed to the shaft tip
- The shaft can therefore be used in any head with a SHAFTLOCK installed
- Any shaft model can be used with the system, as long as they have a .335" tip for woods or .370" tip for irons
- Each head used will need to be bored to take the SHAFTLOCK Hosel Sleeve.
- The SHAFTLOCK connector system has a total weight of just 7g. With a few grams being removed from the head from drilling the hosel bore, the net weight addition is minimal.
- **Customers with heads already tapped to take the original Spiralock/YourFit system can use the Spiralock threaded heads with SHAFTLOCK** (Note: the threaded head may still need to be bored slightly)

SHAFTLOCK COMPONENTS

.335 HOSEL SLEEVE
#TWSL-HS335
.370 HOSEL SLEEVE
#TWSL-HS370

TOP CAP
#TWSL-TC

.400" DRILL BIT FOR WOODS
#TWSL-DB400
.432" DRILL BIT FOR IRONS
#TWSL-DB432

WRENCH (5/8")
#TWSL-W

SHAFTLOCK
CONNECTOR SYSTEM

WishonGolf

FOR MORE INFORMATION ON SHAFTLOCK, VISIT:
WISHONGOLF.COM/SHAFTLOCK-CONNECTOR-SYSTEM

DRIVERS & FAIRWAYS

519SHPR
DRIVERS

NEW FOR 2020

AVAILABLE IN: #9, 11°

A classic player's shape with CG position designed to shape the ball with more precision.

919THI
DRIVERS

AVAILABLE IN: 9°, 11°, 13°, 15.5°
LEFT HAND AVAILABLE IN: 11°
BLACK OXIDE FINISH AVAILABLE IN: 11°, 13°

Available in two unique finishes, all 919THI Drivers feature a bendable hosel for the widest range of custom fitting options.

919F/D
FAIRWAY DRIVER

AVAILABLE IN 14°

A 260cc volume design with maximum COR face; no distance loss, and better control and accuracy

EQ1-NX

AVAILABLE IN: #3, 4, 5, 7

NEW FOR 2020

The most versatile fairway ever designed, created to complement the EQ1-NX Single Length Irons & Hybrids. Through custom assembly options, the EQ1-NX Fairway woods can achieve a fairway wood single length or be played at conventional fairway wood lengths.

365PF

FAIRWAY WOODS

AVAILABLE IN: #3, 4, 5, 7, 9

A Progressive Fairway design, with Wishon proprietary 420THC steel alloy constuction for highest smash factor.

929HS

FAIRWAY WOODS

AVAILABLE IN: #2, 3, 4, 5, 7

LEFT HAND: #3, 5, 7

High COR face design in a semi-shallow face height of 31mm to offer lower CG for ease in getting the ball well up to fly.

SETS

730CL SET

AVAILABLE IN: DRIVER, LONG & HIGH FAIRWAYS
HYBRID IRONS, PW & DW

Designed for use with S2S Ruby Lite graphite shafts, perfect for the sub- 80mph golfer. The 730CL Driver features bendable hosel for +/- 4° custom lie/face angle fitting. The 730CL Long & High Fairway Woods feature a slightly smaller profile than traditional fairways.

FUTURE PRO

JUNIOR SET

AVAILABLE IN: STAINLESS STEEL WOODHEADS #1, 3, 5,
STAINLESS STEEL IRONHEADS #5, 7, 9, DW

The Future Pro stainless steel wood and iron heads offer a quality alternative to cheap aluminum and zinc heads at a "parent-friendly", economical price. Designed with Wishon's hosel weight bore to allow proper weight fitting.

IRONS & HYBRIDS

The brand new single length design concept from Wishon, EQ1-NX, retain the same 8-iron single length, while adding many new performance enhancing features.

EQ1-NX Hybrids allow for custom assembly to match single length irons, representing the most unique and versatile hybrid design ever created.

EQ1-NX

NEW FOR 2020

HYBRIDS

AVAILABLE IN: #4, 5, 6

SINGLE LENGTH IRONS

AVAILABLE IN: #5-9, PW, GW, SW

989CLA

IRONS

NEW FOR 2020

AVAILABLE IN: #4-PW, AW

An all-new one-piece investment cast deep cavty back iron with modern lofts, designed to allow a wider range of custom length fitting capability for clubmakers.

Di595

DRIVING IRONS

NEW FOR 2020

AVAILABLE IN: #2, 3

Lower CG, Higher MOI Driving Iron Design Technology with High COR Face for Better Distance and Control

318RS

HYBRID IRONS

AVAILABLE IN: #3, 4, 5

LEFT HAND AVAILABLE IN: #4

A conventional two-piece investment cast hybrid, with two rails for assistance in hitting from the rough or in tall grass conditions.

775HS

HYBRID IRONS

AVAILABLE IN: #2, 3, 4, 5

A unique Soft Stainless Steel Hosel/ Thin Face, High COR design for great performance on all course conditions.

IRONS & HYBRIDS

565MC
FORGED MILLED CAVITY IRONS

AVAILABLE IN: #3-9, PW, AW

Forged Carbon Steel & CNC Machined for the Highest MOI in a True Forged Iron Design.

CAVITY BACK

MUSCLE BACK

575MMC
FORGED IRONS

CAVITY BACK AVAILABLE IN: #4-9, PW

MUSCLE BACK AVAILABLE IN: #5-9, PW, AW

Progressive Cavity Back and Progressive Muscle Back designs formed by CNC Machining, available as mix and match sets.

979SS
IRONS

AVAILABLE IN: #4-PW, AW, SW

LEFT HAND AVAILABLE IN: #4-PW

Semi-Wide Game Improvement Sole with Progressive Blade Height in a Cast Stainless Design.

771CSI
IRONS

AVAILABLE IN: #4-PW, AW

LEFT HAND AVAILABLE IN: #4-PW

High COR, Variable Thickness Face for the most distance and forgiveness in a super game improvement design.

A CLASSIC PLAYER'S SHAPE

WITH CG POSITION DESIGNED TO SHAPE THE BALL WITH MORE PRECISION

All new Variable Face Design for the 415cc size of the 519SHPR to offer the same high level off center hit forgiveness proven by the 919THI drivers.

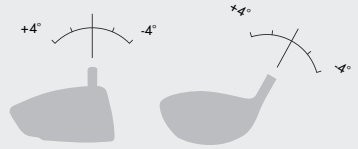

FACE ANGLE LIE

- Player enhancing face angles - 9° model is 0.5° open and 11° is 0° square
- More forward and slightly higher center of gravity enhances ability to work the ball in a trajectory that is more commensurate with a penetrating, lower spin shot pattern
- All 519SHPR drivers undergo six separate face thickness quality checks during production to ensure the most consistent clubface performance and highest smash factor
- The front sole area of the 519SHPR is designed with less face to back radius to allow easier measurement of head specifications for fitting accuracy
- Finished in all black oxide with cool matte black crown. Available in RH in 9° and 11°

Head	Volume	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	Face Prog.	RH/LH
519-9	415cc	9°	58°	0.5° open	202g	13"	GRT	18mm	RH
519-11	415cc	11°	58°	0° square	202g	13"	GRT	18mm	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Bore Depth	Face Area	MOI Izz
519-9	55mm	108mm	105mm	0.335"	13mm	35mm	5075mm^2	4750-cm^2
519-11	55mm	102mm	105mm	0.335"	13mm	35mm	5075mm^2	4750-cm^2

Face Material:
6/4 Titanium Cup-Face

Body Material:
6/4 Titanium

Face Construction:
Forged Variable Thickness (new)

Swingweight Bore:
Yes, 7.5mm diam. X 15mm deep

Ferrule Required:
Yes, any 13.0mm OD X 0.335" ID

Hand Select Options:
+/- 1° loft; +1/-2g weight;

Scorelines:
CNC Engraved 0.8mm X 0.35mm

Bottom of Bore to Ground:
519SHPR = 2"

Bending Options:
+/- 4° lie/face angle

Note: Perform bending only in a driver bending machine or request Wishon custom bending service.

Finished in all black oxide with cool matte black crown

519 SHPR

DRIVERS

9°, 11°

NEW FOR 2020

New 415cc swept back head shape profile with more forward and slightly higher CG to enhance ability to work the ball

THE WIDEST POSSIBLE RANGE IN DRIVER FITTING OPTIONS...

ALL 919THI DRIVER MODELS HAVE WISHON'S PROPRIETARY BENDABLE HOSEL

- 919THI Drivers available in both conventional finish and a beautiful Black Oxide finish – all designed with Wishon's unique bendable hosel
- Variable Thickness Face with High MOI delivers the best off center hit performance in the game
- All 919THI drivers undergo 6 separate face thickness QC checks during production to ensure the highest conforming smash factor
- The 919THI is also available in a black oxide satin finish with red crown highlights for the most modern cosmetic appearance. Available in conventional finish version in RH 9°, 11°, 13°, and 15.5°, and LH in 11°. Black Oxide version in RH in 11° and 13°

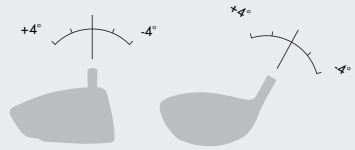

Face Material:
6/4 Titanium Cup-Face

Body Material:
6/4 Titanium

Face Construction:
Forged Variable Thickness

Swingweight Bore:
Yes, 7.5mm diam. X 15mm deep, up to 9g

Ferrule Required:
Yes, any 13.0mm OD X 0.335" ID

Hand Select Options:
+/- 1° loft; +1/-2g weight;

Scorelines:
CNC Engraved 0.8mm X 0.35mm

Bottom of Bore to Ground:
919THI = 2"

Bending Options:
+/- 4° lie/face angle
Note: Perform bending only in a driver bending machine or request Wishon custom bending service.

Head	Volume	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	Face Prog.	RH/LH
919-9	460cc	9°	58°	0 square	202g	13"	GRT	18mm	RH
919-11	460	11	58	0.5 closed	202	13	GRT	19	RH/LH
919-13-HL	460	13	58	1 closed	202	13	GRT	20	RH
919-15.5-HLP	460	15.5	58	1 closed	202	13	GRT	21	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

919 - 11 and 13 are available in Black Oxide finish

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Bore Depth	Face Area	MOI Izz
919-9	53mm	105mm	113mm	0.335"	13mm	35mm	4800mm^2	5004cm^2
919-11	53	105	113	0.335	13	35	4800	5015
919-13-HL	53	105	113	0.335	13	35	4800	5025
919-15.5-HLP	53	105	113	0.335	13	35	4800	5025

NO DRIVER IN THE WORLD CAN OFFER SUCH A WIDE RANGE OF ALL THREE KEY SPECIFICATIONS ON THE SAME HEAD ALTOGETHER.

Through Hand Select and Bending Service, the 919THI drivers can be ordered in any loft from 8° to 16° in half degree increments - in any lie angle from 4° upright to 4° flat of the 59° lie design specification - in any face angle from 4° open to 4° closed from each model's face angle design spec.

9°, 11°, 13°, 15.5°

BLACK OXIDE VERSION AVAILABLE
IN RIGHT HAND ONLY: 11°, 13°

LEFT HAND AVAILABLE IN 11°

919 THI
DRIVERS

SUPERB VARIABLE THICKNESS FACE, >5000 MOI...
DESIGNED WITH A GREAT LOOKING PROFILE AND SHAPE.

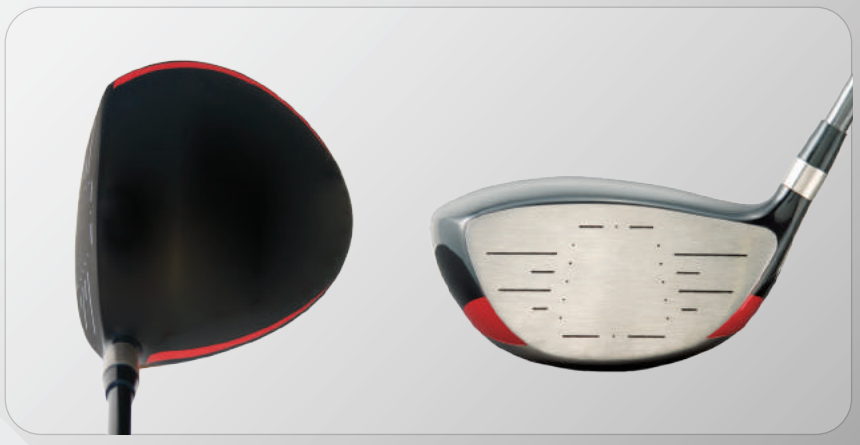

DIAMONDGOLF

EUROPE'S ONLY DEDICATED COMPONENT SUPPLIER SINCE 1978.

Wishon Golf customers are able to benefit from the extensive range of products distributed by Diamond Golf - the largest component supplier to the golf industry in Europe.

Named after legendary singer Neil Diamond, the company was founded in 1978 by Chris Treacy, father of current managing director, Daren Treacy. Since then, it has specialised in supporting clubfitters across Europe and beyond.

Wishon's partnership with Diamond Golf has its roots in the early 1980s after Chris met Tom Wishon at a clubfitting course Tom was hosting. "The enthusiasm for clubmaking Chris showed was so infectious," Tom said. "We became lifelong friendsfrom that first meeting." When Chris passed away, his son Daren took over the business and confirmed the commitment to clubfitting and clubmaking was here to stay.

"The heart and soul of our business lies within clubmaking and clubfitting," said Daren. "Our customers like our wide range of products. They like our freely available technical support. They like the fact we will do all we can for them."

Wishon Golf customers automatically have access to all Diamond Golf products. For most customers, Diamond Golf's shipping policy allows free shipping over a certain level. This makes many of the Diamond Golf products (mostly shafts and grips) an affordable option. "Our aim is to make everyone happy. If we can supply all that you need then we've done our job," said Daren. "Our new online store will feature all the products available to all customers in all regions."

MITSUBISHI CHEMICAL / GRAPHITE SHAFTS · GRAFALLOY · LAMKIN · AVON · TRUE TEMPER · G-Rip · Golf Pride · winn · NIPPON SHAFT · THE GRIP MASTER · KBS · SuperStroke · UST Mamiya · SHIMADA · tacki-mac grips · GOLF MECHANIX · APOLLO · ALDILA · GRAPHITE DESIGN · AeroTech · PROJECT X · FLAT CAT GOLF

A PERFECT FITTING OPTION FOR MORE CONTROL ON TIGHT HOLES
OR MORE DISTANCE FOR LONG SECOND SHOTS

919F/D
FAIRWAY DRIVER

14°

NEW

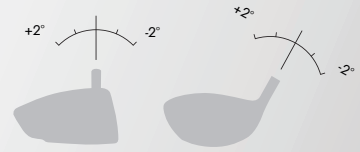

FACE ANGLE LIE

- 919F/D is a "mini-driver", 260cc volume design for use off the tee on tight tee shot holes where control and accuracy is critical, engineered to be built to lengths between 42" and 44"
- Maximum COR face design for zero distance loss compared to any large titanium driver head
- Available in RH only 14° loft with Wishon Golf's bendable hosel design
- Wishon Hand Select and Bending Service can deliver the 919F/D in lofts from 13° to 15°, lies from 2° up to 2° flat and face angles from 4° open to 4° closed for maximum fitting options for all golfers

Head	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll
919F/D-14	14	57	0 square	205g	13"	GRT

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Volume	Face Area	MOI Izz
919F/D	39mm	93mm	87mm	0.335"	12.3mm	260cc	3200mm^2	2855gcm^2

Face Material: HS300 high strength steel

Body Material: Sole/Skirt & Crown - 17-4 Stainless Steel; Hosel - 304 Stainless Steel

Hosel Material: 304 Stainless Steel

Swingweight Bore: 1) Hosel Weight Bore; 2) Sole Weight Bore up to 9g

Ferrule Required: Yes, any 12.3mm OD x 0.335" ID

Hand Select Options: +/-1° loft; +/-3g headweight

Bending Options: +/-2° lie, face angle
Note: Perform bending only in a metal wood bending machine or request Wishon custom bending service

Scorelines: CNC Engraved, 0.8mm wide x 0.2mm deep

Bottom of Bore to Ground: 919F/D = 2"

SEMI SHALLOW FACE, HIGH COR DESIGN...

FOR DISTANCE WITH SUPER SHOT CONSISTENCY

- Wishon's bendable steel hosel is separately welded to the body to enable ease in bending for a wide range of custom lie and face angle bending (+/-4°)
- 31mm semi-shallow face height is ideal for golfers who play off tight, close mown fairways and for golfers who need more confidence getting the ball well up to fly
- HS 300 high strength steel thin face allows for a high COR for increased ball speed
- Reduced face-to-back sole width narrows the sole to ground contact for more consistent contact with the ball, even from the rough
- 929HS is a past winner of Best Fairway Wood recognition in the Golf Digest Hot List Awards
- 929HS available in black gloss finish in RH #2, 3, 4, 5, 7 and LH in #3, 5, 7

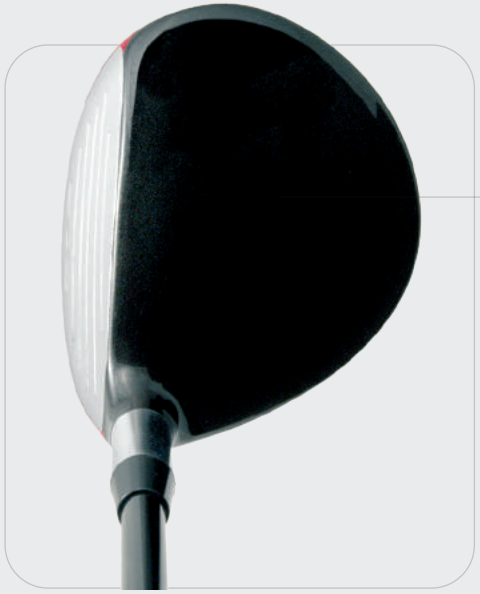

Full Radius Round Profile

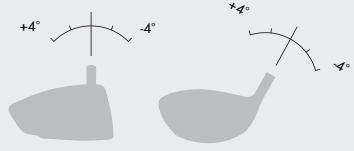

Head	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	Face Prog.	RH/LH
929-2-RH	12°	57.5°	0 square	203g	13"	GRT	14mm	RH
929-3-RH	14	58	0 square	208	14	GRT	14	RH
929-3-LH	15	58	0 square	208	14	GRT	14	LH
929-4-RH	16.5	58.5	0 square	213	14	GRT	15	RH
929-5-RH	18	59	0 square	218	16	GRT	16	RH
929-5-LH	18.5	59	0 square	218	16	GRT	16	LH
929-7-RH/LH	21	60	0 square	228	16	GRT	17.5	RH/LH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Face Thick
#2 - 12°	31mm	84mm	77mm	0.335"	12.3mm	1.70mm
#3 - 14	31	84	76	0.335	12.3	1.65
#3LH - 15	31	84	76	0.335	12.3	1.65
#4 - 16.5	31	84	76	0.335	12.3	1.65
#5 - 18	31	84	75	0.335	12.3	1.65
#5LH - 18.5	31	84	75	0.335	12.3	1.65
#7 - 21	31	84	75	0.335	12.3	1.60

Face Material:
HS 300 High Strength Steel (NiCr plated)

Body Material:
Sole/Skirt & Crown - 17-4 Stainless Steel; Hosel - 304 Stainless Steel

Hosel Material:
304 Stainless Steel

Weight Bore:
1) Hosel Weight Bore (up to 9g)
2) Sole Weight Bore (up to 9g)

Ferrule Required:
Yes, any Wishon Wood Standard with 12.3mm Bottom OD

Hand Select Options:
+/- 1° loft
+/- 2g headweight

Lie/Face Angle Bending:
+/-4° in all directions

Bottom of Bore to Ground:
929HS = 1.5"

BENDABLE STAINLESS STEEL HOSEL

ALLOWS CUSTOM LIE AND FACE ANGLE FITTING

Second Weight Bore

929HS

FAIRWAY WOODS

#2, 3, 4, 5, 7

LEFT HAND AVAILABLE IN #3, 5, 7

Semi-Shallow Face Height

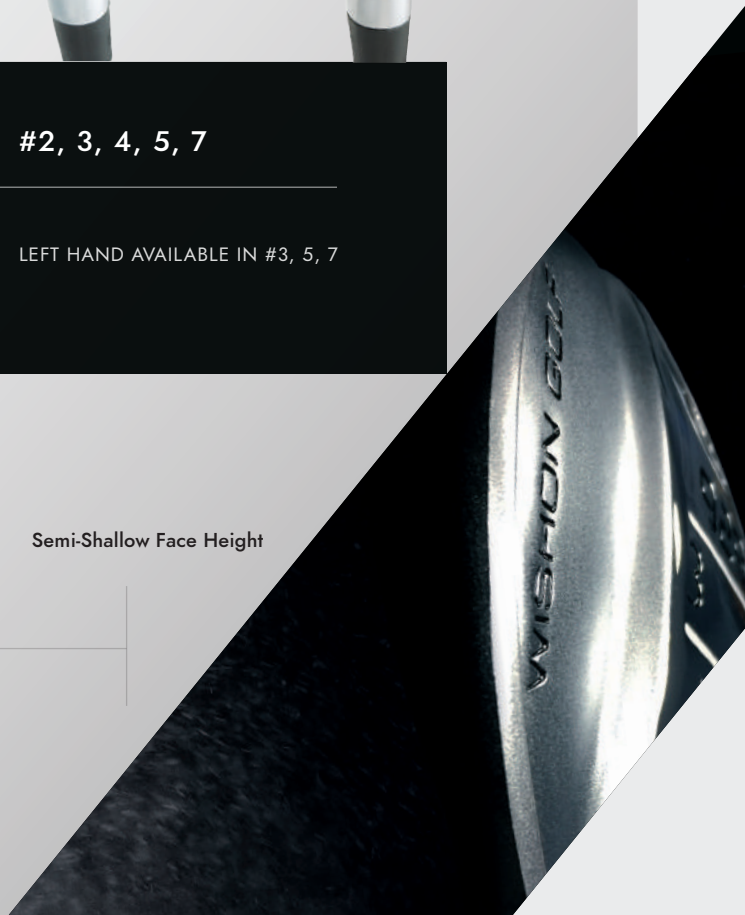

PROGRESSIVE FAIRWAY WOOD PROFILE DESIGN...

FIT & BUILD AS ALL FAIRWAY WOOD OR AS COMBINED FAIRWAY & HYBRID SET MAKEUP

- Head size and shape progresses gradually from traditional fairway wood in the #3 and 4 to slightly smaller fairway profile for the #5, to a slightly more narrow fairway to semi-broad hybrid in the #7 and 9
- Twin weight bores allows assembly from traditional fairways to hybrid lengths as desired for the golfer
- The highest smash factor found in a conventional investment cast steel head, achieved through Wishon's metallurgical experience and knowledge. 365PF offers the best combination of performance and value in a woodhead design
- Bendable hosel allows a range of +/-2° in the lie and the face angle. Hand Select for loft offers +/-1° options for each head model from its designed loft spec
- Available in RH in #3 (15°), #4 (16.5°), #5 (18°), #7 (21°) and #9 (24.5°)

Head	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	Face Prog.	RH/LH
365-3-RH	15°	57°	0 square	208g	14"	GRT	15mm	RH
365-4-RH	16.5	57.5	0 square	213	14	GRT	15mm	RH
365-5-RH	18	58	0 square	218	16	GRT	16mm	RH
365-7-RH	21	59	0 square	228	16	GRT	17mm	RH
365-9-RH	24.5	60	0 square	238	18	GRT	18mm	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Face Thick
365-3-RH	33mm	86mm	75mm	0.335"	12.3mm	2.75mm
365-4-RH	33	86	74	0.335	12.3	2.75
365-5-RH	33	86	73	0.335	12.3	2.75
365-7-RH	32	84	71	0.335	12.3	2.75
365-9-RH	32	84	68	0.335	12.3	2.75

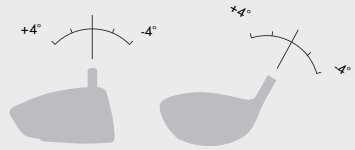

Body Material:
Investment Cast 420THC Steel

Hosel Material:
304 Stainless Steel

Hosel Weight Bore:
1) hosel – up to 9g
2) sole – up to 9g

Ferrule Required:
Yes, any Wishon Wood Standard with 12.3mm Bottom OD

Hand Select Options:
+/-1° loft
+/-2g headweight

Lie/Face Angle Bending:
+/-2° Lie and Face Angle

Bottom of Bore to Ground:
365PF = 1.5"

Second Weight Bore

365PF
FAIRWAY WOODS

#3, 4, 5, 7, 9

PROPRIETARY 420THC STEEL CONSTRUCTION

DELIVERS THE HIGHEST SMASH FACTOR IN AN ALL INVESTMENT CAST WOODHEAD DESIGN

In Between Traditional and Semi-Shallow Face Height

WISHON GOLF'S NEW SINGLE LENGTH
DESIGN CONCEPT...

EQ1-NX

SINGLE LENGTH

NEW FOR 2020

SINGLE LENGTH IRONS
AVAILABLE IN: #5-9, PW, GW, SW
PAGE 32

FAIRWAY WOODS
AVAILABLE IN: #3, 4, 5, 7
PAGE 28

HYBRIDS
AVAILABLE IN: #4, 5, 6
PAGE 30

The EQ1-NX consists of Wishon's newest single length iron design, alongside the most unique and versatile fairway wood and hybrids ever created.

The EQ1-NX retains the same 8-iron single length and high COR low loft iron characteristics while adding many new performance features to mark a definite step forward in game improvement iron design.

The EQ1-NX Fairway Woods and Hybrids have been created to offer a greater range of options in golfers' single length sets with a wide range of innovative features.

WHY SINGLE LENGTH?

As golf has always been steeped with traditions, golfers as a whole have demonstrated a general and consistent tendency to not deviate too far outside the norm of such traditions in the game.

Like any new and different golf equipment concept which gains awareness and attention, there are a lot of questions concerning single length sets of irons, which we hope we can clear up..

What is the technical explanation to support an argument about single length irons being better for a golfer than conventional incremental irons?

In a single length set of irons, every club is made so that all swing feel elements are the same in each club - same length, same shaft weight, same total weight, same head weight, same swingweight, same balance point, same MOI, and the same shaft stiffness/bend profile design. The only element different with single length clubs are the loft angles of each club, to enable each club to hit the ball different distances.

Normal incremental length sets of irons cannot duplicate that many different fitting elements. While it is possible to build incremental length sets of irons to match the same MOI, each club will be different in total weight, head weight, swingweight, and balance point.

What is the reason a golfer might consider making a change from normal incremental length irons to single length set of irons?

The technical basis behind the creation of a set of single length irons is to say that if all the clubs have the same length, the same total weight, the same headweight, and the same balance point it will enable the golfer to use the same stance, posture, spine angle, swing plane - the same everything in the swing. As such, the single length approach has a chance to offer a higher level of swing repeatability and shot consistency for each of the clubs in the set.

At the same time, it must be said that many golfers have achieved very good swing and shot consistency using irons built to normal incremental lengths which are very accurately custom fit to their size, strength, athletic ability and swing characteristics. However, if a golfer has suffered from chronic or occasional shot inconsistency, converting to a single length concept could offer some help.

Why should I consider buying a set of EQ1-NX Single Length Irons?

We're a little prejudiced at Wishon Golf because we feel the major changes we have made in the latest single length design of the new EQ1-NX irons, coupled with our depth of understanding of the concepts of proper fitting of Single Length sets, make it a possibility for a very high percentage of golfers to gain a significant improvement in swing and shot consistency.

We know from 6 years of single length iron development that the Wishon Golf EQ1-NX Single Length irons have all the requirements to deliver a seamless transition for shot distance with each club compared to a conventional set, while at the same time offering the main benefit of the Single Length concept of identical swing motion and feel for every club.

FOR MORE ABOUT THE SINGLE LENGTH CONCEPT,
VISIT **WISHONGOLF.COM**

THE MOST VERSATILE FAIRWAY EVER DESIGNED...

CREATED TO OFFER AN OPTION BETWEEN THEIR OWN 40" TO 41" SINGLE LENGTH TO COMPLEMENT THE EQ1 IRONS/HYBRIDS OR CONVENTIONAL LENGTH AS STANDALONE FAIRWAY WOODS

The EQ1-NX Fairway Woods represent the most unique and versatile fairway wood design ever created through a greatly expanded internal weight addition capability to allow custom assembly to achieve a fairway wood single length or to be played at conventional fairway wood lengths.

- Each EQ-1-NX fairway wood head is produced with the ability to add up to a maximum of 30g to achieve normal swingweights at a 40" to 41"single length to complement the EQ1-NX single length irons and hybrids
- Natural head weight spec of each EQ1-NX fairway wood head also allows assembly to conventional wood lengths of #3(42"-43"), #4(41.5"-42.5"), #5(41"-42"), #7(40"-41"). Any length in between 40" and conventional fairway wood lengths is also capable for an even wider range of fitting options
- High COR thin high strength steel face design
- Available in #3(15*) #4(17*), #5(19*), #7(21*) in RH. For single length use we recommend a set makeup of #3/#5 for better ball strikers or players with a driver clubhead speed over 95mph and a set makeup of #4/#7 for average players or any golfers with a driver clubhead speed under 95mph
- The four different weight bores allow for maintaining the best CG position low and center located, as well as to be able to increase the trajectory with the new twin rear sole weight bores
- Each EQ1-NX fairway is shipped with 2 x 6g and 2 x 9g weights included to make it more economical when building to match the EQ1 single length irons
- The spec lie angle of 60* for each EQ1-NX fairway wood is created for assembly to the single length option between 40" and 41". EQ1-NX fairway woods are capable of being bent up to 2° to allow proper lie fitting when assembled to conventional fairway wood lengths

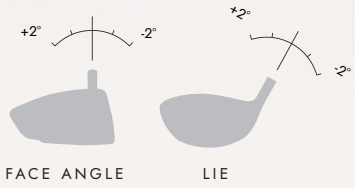

FACE ANGLE LIE

Head/Body Material:
431 Stainless Steel

Face Material:
C455 high strength steel, variable thickness face construction

Ferrule Required:
Yes, #121-WD-STD

Hand Select Options:
+/-1° loft;
+/-2g head weight

Scorelines:
CNC engraved, 0.8mm wide x 0.25mm deep

Weight Bores:
1) Hosel Weight Bore (up to 9g)
2) Toe/Sole Weight Bore (up to 9g)
3) Rear Sole Twin Weight Bores, both capy. 6g; Total of 30g can be added to each EQ1-NX fairway head

Hosel Length/Bore Depth:
60mm/30mm

Lie/Face Angle Bending:
+/-2° in all directions.
Note: perform bending only in a metal wood type bending machine or request Wishon custom bending service.

Bottom of Bore to Ground:
1.5 (38mm)

Head	Desc	Loft	Lie	Weight	Face Prog.	Bulge	Roll
TW866FW-3	3-Wood	15°	60°	207g	16.5mm	14"	GRT
TW866FW-4	4-Wood	17	60	212	17	14	GRT
TW866FW-5	5-Wood	19	60	217	18	15	GRT
TW866FW-7	7-Wood	21	60	227	19	16	GRT

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Face Thick
TW866FW-3	30mm	90mm	78mm	0.335"	12.3mm	1.8mm/2.2mm
TW866FW-4	30	90	78	0.335	12.3	1.8/2.2
TW866FW-5	31	91	78	0.335	12.3	1.8/2.2
TW866FW-7	31.5	91.5	79	0.335	12.3	1.8/2.2

AVAILABLE MID-JUNE

NEW FOR 2020

EQ1-NX

FAIRWAY WOODS

#3, 4, 5, 7

HEADCOVER
#TW163-EQ1-FW

THE MOST VERSATILE HYBRID EVER DESIGNED...

CREATED TO OFFER AN OPTION BETWEEN SINGLE LENGTH TO MATCH THE EQ1-NX IRONS, OR CONVENTIONAL LENGTH AS STANDALONE LONG IRON REPLACEMENT HYBRIDS

The EQ1-NX Hybrids represent the most unique and versatile hybrid design ever created through a greatly expanded internal weight addition capability to allow custom assembly to match single length irons or to be played at conventional hybrid length.

- Each EQ-1-NX hybrid head is produced with the ability to add up to a maximum of 30g to achieve normal swingweights at 8-iron single length to match the EQ1-NX single length irons
- Natural head weight specification of each EQ1-NX hybrid head also allows assembly to conventional hybrid lengths of #4(38"-39"), #5(37.5"-38.5"), #6(37"-38"). Any length in between 8-iron and conventional hybrid lengths is also capable for an even wider range of fitting options
- High strength steel, thin variable thickness face, high COR design. 0.335" bore to accept any S2S Hybrid shaft. Though the EQ1-NX hybrid heads can be reamed to accept any 0.370" iron shaft, we recommend using an appropriate S2S graphite hybrid shaft when matching the EQ1-NX hybrids to the EQ1-NX irons in a full single length set makeup
- Available in #4(20*), #5(24*), #6(28*) in RH to match the lofts and loft gaps of the EQ1-NX irons
- The four different weight bores allow for maintaining the best CG position low and center located, as well as to be able to increase the trajectory with the new twin rear sole weight bores
- Each EQ1-NX Hybrid is shipped with 2 x 6g and 2 x 9g weights included to make it more economical when building to match the EQ1 single length irons
- Spec lie angle for each EQ1-NX hybrid is 63° to match the EQ1-NX single length irons. EQ1-NX Hybrids are capable of being bent up to 3° to allow proper lie fitting when assembled to conventional hybrid lengths

Head	Desc	Loft	Lie	Weight	Face Prog.	Bulge	Roll
TW866HY-4	4-hybrid	20°	63°	255g	14mm	16"	GRT
TW866HY-5	5-hybrid	24°	63°	262g	15mm	17"	GRT
TW866HY-6	6-hybrid	28°	63°	269g	16mm	18"	GRT

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Face Thick
TW866HY-4	29mm	87mm	62mm	0.335"	12.8mm	1.8mm/2.2mm
TW866HY-5	30	88	63	0.335	12.8	1.8/2.2
TW866HY-6	31	88	63	0.335	12.8	1.8/2.2

Note: The EQ1-NX hybrids use a different medallion to cover the twin weight bores on the rear sole than is used for the EQ1-NX fairway woods. The half-circle shaped medallion for the EQ1-NX hybrids has a red dot over the Wishon Golf name while the medallion for the EQ1-NX wood does not have a dot over the Wishon Golf name.



FACE ANGLE LIE

Head/Body Material:
431 Stainless Steel

Face Material:
C455 high strength steel, variable thickness face construction

Ferrule Required:
Yes, #121-HY

Hand Select Options:
+/-1° loft;
+/-2 grams for head weight

Scorelines:
CNC engraved, 0.8mm wide x 0.25mm deep

Weight Bores:
1) Hosel Weight Bore (up to 9g)
2) Toe/Sole Weight Bore (up to 9g)
3) Rear Sole Twin Weight Bores, both capacity. 6g; Total of 30g can be added to each EQ1-NX hybrid head

Hosel Length/Bore Depth:
60mm/30mm

Lie/Face Angle Bending:
+/-3° in all directions. Note: perform bending only in a metal wood type bending machine or request Wishon custom bending service.

Bottom of Bore to Ground:
1.5 (38mm)

AVAILABLE MID-JUNE

NEW FOR 2020

EQ1-NX

HYBRIDS

#4, 5, 6

HEADCOVER
#TW163-EQ1-HY

THE CULMINATION OF THE HIGHEST PERFORMANCE AND DESIGN CHARACTERISTICS IN ANY SINGLE LENGTH IRON EVER DESIGNED...

PIONEERED BY WISHON GOLF TECHNOLOGY

Wishon's brand-new single length iron desig concept, the EQ1-NX, retain the same 8-iron single length and high COR low loft iron characteristics while adding many new performance enhancing features to mark a definite step forward in game improvement iron design.

- Enabled by the new 2-piece hollow body design, the Center of Gravity moves progressively through the set from lowest and most rear located on the #5 iron to highest and most forward located on the GW and SW to achieve more consistent shot shape and shot height for each iron in the set
- The hollow body design throughout the set increases the MOI of each head by removing all mass from the inside of the head to be distributed all around the CG. The hollow body construction also enables the CG progression and uniform impact sound between the high COR and conventional COR heads in the set
- Low number irons are better matched with their loft to CG position to achieve preferred shot shape/height and allow a wider range of players to be able to effectively hit the #5 and 6 irons to fly and carry with proper distance gaps
- Traditional GW and SW profile shapes are combined with milled faces and a custom sole grind make the wedges a great choice even if they were standalone wedges and not part of the single length design
- 275g head weight with hosel weight bore allows assembly to any single length between 35.5" and 37.5" while still being able to achieve a reasonable range of swingweight/MOI (depending on shaft weight and grip weight)

WALL THICKNESS COMPARISON

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length
TW866-5	5-iron	24°	63°	275g	2mm	5°	57mm	33mm	83mm
TW866-6	6-iron	28	63	275	2	5	57	33.5	83mm
TW866-7	7-iron	32	63	275	2	5	59	34	83mm
TW866-8	8-iron	36	63	275	2	5	60	35	83mm
TW866-9	9-iron	40	63	275	2	5	60.5	35.5	83mm
TW866-PW	PW	45	63	275	2	6	61	36	83mm
TW866-GW	GW	50	63	275	2	10	61	36	83mm
TW866-SW	SW	55	63	275	2	12	61.5	36.5	83mm



Head Material:
431 Stainless Steel (body); C455 HSS (#5, 6, 7 faces)

Ferrule Required:
Any IR ferrule with 13.2mm bottom OD and 0.370" ID (#121-IR)

Scorelines:
U-Groove 0.8mm wide x 2.8mm spacing x 0.4mm deep

Loft/Lie Bending:
+/-3° in any direction

Hosel Length/Bore Depth:
65mm/30mm

Hosel Weight Bore:
capacity. 9g

Sole Width Range Toe/Centre/Heel:
#5, 6 - 20.5mm/19.5mm/15mm;
#7, 8 9, P - 21mm/20mm/15.5mm;
GW - 22mm/21mm/17mm;
SW - 23mm/22mm/17mm

Face-Back Sole Radius at Toe/Centre/Heel:
#5-PW - 50mm/45mm/40mm; GW-SW - Custom Grind

Bottom of Bore to Ground:
1 5/8" (40mm)

AVAILABLE LATE MAY

NEW FOR 2020

EQ1-NX

SINGLE LENGTH IRONS

#5-9, PW, GW, SW

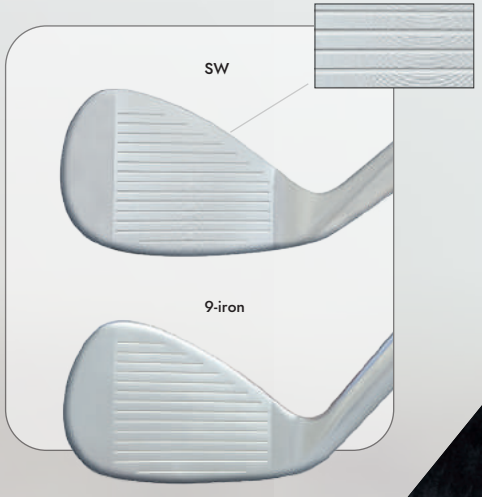

CNC Milled Face

TWIN WEIGHT BORE, VERSATILE DESIGN

OFFERING A WIDE RANGE OF LENGTH & SWINGWEIGHT OPTIONS

- Twin Rail sole design enhances a smooth travel through tall grass and Bermuda type grasses while maintaining completely normal performance on short fairway turf
- Special custom heat treatment process enables the 431 stainless steel face to be made thinner to increase smash factor for more distance beyond what is normal for cast hybrid head designs
- Increased body weight at the rear of the head combines with the heavy Rail sole construction to create a lower/more rear Center of Gravity for higher launch and softer landing on the greens
- Face Progression is in between a fairway wood and iron to offer a very pleasing look behind the ball
- Twin Weight Bores allow a maximum addition of 18g to the head to offer custom assembly to a very wide range of swingweights (MOI) with different shaft weights and grip weights
- 0.335″ parallel bore diameter design to match with any of Wishon Golf's S2S Hybrid shaft designs
- Available in RH in a black oxide finish in #3, 4, 5. Left hand available in #4 only



FACE ANGLE LIE

Head/Body Material:
2-piece investment cast 431 Stainless Steel

Ferrule Required:
Yes - any Wishon Golf standard 0.335" ID ferrule with 12.3mm bottom OD

Scorelines:
0.8mm wide x 0.2mm deep; U-Groove; #5 with new 2010 USGA/R&A scorelines

Weight Bore:
1) Hosel Weight Bore (up to 9g)
2) Sole Weight Bore (up to 9g)

Hosel Length/Bore Depth:
58mm/30mm

Hand Select Options:
+/-1° loft, lie and face angle; +/-2 grams for head weight

Bending Options:
+/-2° from specs for lie and/or face angle fitting

Bottom of Bore to Ground:
1.25" (32mm)

Head	Desc.	Static Loft*	Lie	Weight	Face Progression	Bulge	Roll	RH/LH
318-3	3-iron/hybrid	22°	58°	240g	12mm	16″	20″	RH
318-4	4-iron/hybrid	25	59	247	12.5	18″	20″	RH/LH
318-5	5-iron/hybrid	28	60	254	13	20″	20″	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD
318-3	30mm	82mm	62mm	.335″	12.3mm
318-4	30.5	82	62	.335″	12.3
318-5	31.25	82	62	.335″	12.3

CARBIDE ENDMILL DRILL BIT
#TWSDB-370

For those clubmakers wishing to convert a 318RS Hybrid hosel to a parallel .370 hosel.

See back page for more info

Twin Rail Design

318RS

HYBRID IRONS

#3, 4, 5

LEFT HAND AVAILABLE IN #4

TWIN RAIL-SOLE DESIGN...

FOR EASE OF PLAY FROM ANY TURF CONDITIONS

A MODERN HYBRID DESIGN

WITH THIN FACE AND HIGH COR PERFORMANCE

- Thin, high COR, high strength HS 300 alloy face delivers a higher ball velocity for more distance in a modern hybrid head design
- Unique 304 grade stainless steel hosel offers very easy bending adjustments to custom fit a very wide range of golfers
- 775HS Hybrids are designed with a split-level, narrowed primary sole width for more consistent shotmaking from both fairway or rough conditions
- 775HS Hybrid face progression is in between an iron and a fairway wood to offer an appearance that generates more confidence with the shot
- 0.335" hosel bore diameter of the 775HS Hybrids is designed to match with any of the S2S White, S2S Black, S2S Red or S2S Blue 55 Hybrid shaft designs
- Available in RH in #2, 3, 4, 5. All 775HS hybrids are designed with two weight bores to expand fitting options for length, shaft weight and swingweight

Head	Desc	Static Loft*	Lie	Weight	Face Progression	Bulge	Roll	RH/LH
775-2	2-iron/hybrid	18°	58°	232g	16mm	16"	0	RH
775-3	3-iron/hybrid	21	59	239	17	18	0	RH
775-4	4-iron/hybrid	24	60	246	18	20	0	RH
775-5	5-iron/hybrid	27	61	253	19	20	0	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Head	Face Height	Face Width	Front-Back	Bore Diam.	Hosel OD	Face Thick
775-2	34mm	84mm	62mm	0.335"	13.2mm	1.70mm
775-3	34	84	62	0.335	13.2	1.65
775-4	34	84	62	0.335	13.2	1.65
775-5	34	84	62	0.335	13.2	1.65

CARBIDE ENDMILL DRILL BIT
#TWSDB-370

For those clubmakers wishing to convert a 318RS Hybrid hosel to a parallel .370 hosel.

See back page for more info

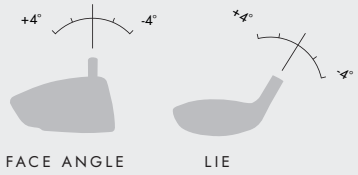

FACE ANGLE LIE

Head/Body Material:
Sole/Skirt & Crown - 17-4 Stainless Steel; Hosel - 304 Stainless Steel

Hosel Material:
304 Stainless Steel

Face Material:
HS 300 High Strength Steel (NiCr Plated)

Ferrule Required:
Yes, #121-HYBRID

Scorelines:
CNC Engraved, 0.8mm wide x 0.2mm deep; #5 with new USGA scorelines

Weight Bore:
1) Hosel Weight Bore (up to 9g)
2) Sole Weight Bore (up to 9g)

Hosel Length/Bore Depth:
60mm/30mm

Lie/Face Angle Bending:
+/-4° in all directions
Note: Perform bending only in a metal wood type bending machine or request Wishon custom bending service

Bottom of Bore to Ground:
775HS = 1.5"

Second Weight Bore

775HS
HYBRID IRONS

#2, 3, 4, 5

A UNIQUE STAINLESS STEEL HOSEL...
FOR A WIDE RANGE OF LIE AND
FACE ANGLE FITTING OPTIONS

775HS Hybrids match perfectly with
S2S Hybrid shafts, available in multiple weights

LOW CG, HIGH MOI DRIVING IRON DESIGN. . .

WITH HIGH COR FACE FOR INCREASED DISTANCE AND BETTER CONTROL



Head Material:
Investment cast 431 Stainless Steel

Face Material:
C455 high strength steel

Ferrule Required:
Yes, #121-IR for 0.335" bore of Di595. If reamed to .370" bore, use any IR ferrule with 13.2mm bottom OD.

Loft/Lie Bending:
+/-2° in any direction

Hosel Weight Bore:
9g capacity.

Bore Diameter:
8.6mm (0.335")(can ream to 0.370" if desired)

Sole Width at T/C/H:
23mm/25mm/19mm

Bottom of Bore to Ground:
1.5/8" (45mm)

- Designed to be played as a pure driving iron on tight par-4 and par-5 holes or as a hybrid alternative for golfers who prefer the look and shape of an iron
- Thin, high strength steel, high COR face design for higher ball speed and smash factor for more distance with control
- Designed to be fit and played with any of the S2S Blue, White, Black and Red graphite hybrid shafts to combine with the low and rear located CG for full carry shot trajectory. Hosel can be reamed to a 0.370" bore for using an iron shaft if desired.
- The lower and more rear located center of gravity from the lower mass on the rear of the wider sole is key to a higher launch and trajectory to ensure maximum distance for a driving iron
- Full radius sole design also makes the DI595 a great club to use for long second shots from the fairway

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length
595-2	2-iron	18°	57°	233g	2mm	4°	54.5mm	33mm	84mm
595-3	3-iron	21	58	240	2	4	55.5	33.5	83mm

DESIGNED TO BE PLAYED WITH S2S HYBRID SHAFTS...

TO COMBINE WITH THE LOW AND REAR CG FOR FULL CARRY SHOT TRAJECTORY

AVAILABLE LATE APRIL

Di595

DRIVING IRON

#2, 3

NEW FOR 2020

CUSTOM LENGTH ASSEMBLY

DESIGNED TO ALLOW A WIDER RANGE OF CUSTOM LENGTH FITTING CAPABILITY FOR CLUBMAKERS

- 989CLA (Custom Length Assembly) means lighter specification head weight combined with new rear cavity twin weight bores to achieve normal swingweight/MOI assembly at custom lengths from 1 inch under to 1 inch over standard lengths (standard lengths based on 38" #5 iron with half-inch increments between each numbered iron)
- Progressive blade height from semi-shallow in the #4, 5 to taller in the wedges keeps the CG lower in the low loft heads while raising the CG in the high loft irons to enable higher flight with the lower lofts and no ballooning flight with the high loft irons
- Modern loft design to compare with other modern strong loft iron designs
- Deep undercut back cavity design to increase MOI and off-center hit performance with low 2mm offset on each iron in the set
- Outstanding sole design with beveled leading and trailing edge design, ideal for all types of grass and turf conditions
- Available in RH in #4, 5, 6, 7, 8, 9, PW and AW, in bright mirror polish finish with silicon bead blast highlights and medallion cover for rear twin weight bores.

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length
989CLA-4	4-iron	20°	59°	243g	2mm	5°	56.5mm	34mm	83mm
989CLA-5	5-iron	23	60	250	2	5	58	35	83mm
989CLA-6	6-iron	27	61	257	2	5	60	36	83mm
989CLA-7	7-iron	31	62	264	2	5	61	36.5	83mm
989CLA-8	8-iron	35	63	271	2	6	62	37	83mm
989CLA-9	9-iron	40	64	278	2	6	63	37.5	83mm
989CLA-PW	PW	45	64.5	281	2	7	63	37.5	83mm
989CLA-AW	AW	50	65	282	2	7	63	37.5	83mm



Head Material:
Investment cast 431 one-piece stainless steel construction

Ferrule Required:
Yes, #121-IR for 13.2mm Top Hosel OD

Scorelines:
U-Groove 0.8mm wide x 2.8mm spacing x 0.45mm deep

Loft/Lie Bending:
+/-3° in any direction

Weight Bores:
1) Hosel Weight Bore, capy 9g;
2) Rear Twin Weight Bores, both capacity 2 x 6g;
Total Weight addition capability 21g for each head

Hosel Length/Bore Diam./ Bore Depth:
65mm/9.45mm (0.372")/35mm

Sole Width at Toe/Heel:
#4 iron - 21mm/20mm/15mm
#7 iron - 22mm/21mm/16mm
#PW - 22.5mm/21.5mm/16mm

Toe/Heel Leading Edge Radius:
250mm for all irons and wedges

Face-Back Sole Radius:
#4–9 - 60mm/60mm/50mm
#PW-AW - 70mm/70mm/60mm

Bottom of Bore to Ground:
1.5" (38mm)

AVAILABLE LATE APRIL

989 CLA IRONS

#4-9, PW, AW

NEW FOR 2020

Twin Weight Bores

SEMI-WIDE GAME IMPROVEMENT DESIGN...

WITH PROGRESSIVE BLADE HEIGHT IN A CAST STAINLESS DESIGN



- Progressive blade height design graduates through the set from semi-shallow low CG on the long irons to conventional blade height on the short irons
- Semi-Wide, symmetrical width sole design with face-to-back radius and blunt leading edge achieves the most game improvement for clean, solid contact through all grass/turf conditions
- Undercut back cavity combines with semi-wide sole to keep CG lower for more game improvement launch angle assistance
- Twin weight bores allow for a maximum headweight addition of 15g to satisfy any combination of custom length and shaft weight fitting considerations
- Precision investment cast from 431 stainless steel for ease in loft/lie bending, finished in a bright satin finish with attractive cosmetic highlights. Available in RH in #4-PW, AW, SW and in LH in #4-PW

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	RH/LH
979-4	4-iron	23	60	245	3	2	51.5	32	82	RH/LH
979-5	5-iron	26	61	252	2.5	2	53	33	82	RH/LH
979-6	6-iron	30	61.5	259	2.5	2.5	55	34	82	RH/LH
979-7	7-iron	34	62	266	2.5	3	56.5	35	82	RH/LH
979-8	8-iron	38	63	273	2	3	57	35.5	82	RH/LH
979-9	9-iron	42	64	280	2	4	58	36.5	82	RH/LH
979-PW	PW	46	64	282	2	5	59	38	82	RH/LH
979-AW	AW	50	64	282	2	5	59	38	82	RH
979-SW	SW	55	64	298	2	11	60	39	82	RH

Head Material:
431 Stainless Steel

Ferrule Required:
Any IR ferrule with 13.2mm bottomOD and 0.370" ID

Scorelines:
U-Groove 0.8mm wide x 2.6mm spacing x 0.35mm deep

Loft/Lie Bending:
+/-2° in any direction

Hosel Length/Bore Depth:
65mm/30mm

Hosel Weight Bore:
up to 9g

Lower Back Cavity Weight Bore:
up to 6g

Bore Diameter:
0.370"

Sole Width Range:
#4–5 - 20mm/22mm/17.5mm
#6–8 - 20.5mm/22.5mm/17.5mm
#9–wedges - 21mm/23mm/18mm

Toe/Heel Leading Edge Radius:
#4–8 - 250mm
#9, PW, AW - 275mm
#SW - 300mm

Face-Back Sole Radius:
#4–6 - 60mm/50mm
#7–AW - 70mm/60mm
#SW - 90mm/80mm

Bottom of Bore to Ground:
979SS = 1.5"

HIGH MOI, LOW CG...

WITH TWO WEIGHT BORES FOR A WIDE RANGE IN ASSEMBLY OPTIONS

979ss IRONS

#4-PW, AW, SW

LEFT HAND AVAILABLE IN #4-PW

Deep Undercut Back Cavity pushes mass down to lower the centre of gravity

HIGH COR, VARIABLE THICKNESS FACE

FOR THE MOST DISTANCE AND FORGIVENESS IN A SUPER GAME IMPROVEMENT IRON

- High 0.830 COR face design offers the most distance for all golfers
- CNC machined variable thickness face delivers superb off-center hit forgiveness
- Head body material is 1020C carbon steel to allow clubmakers to perform a wide range in loft and lie bending – previously all high COR thin face designs had to be mounted in a 17-4 stainless body, which limited loft and lie fitting options
- Conventional head size and shape means a wider range of golfers from low to high handicappers will like the 771CSI design
- Fully radiused sole design with rounded leading edge offers golfers the best playability from all types of grass as well as from the rough
- Available in RH in #4-9, PW, AW; LH in #4-9, PW in bright satin NiCr electroplated finish

CNC Machined Variable Thickness Face delivers superb off centre hit performance while keeping the on centre COR as close to .830 as possible



Head/Body Material:
Investment cast 1020C Carbon Steel

Face Material:
HS 300 High Strength Steel

Ferrule Required:
Any Wishon IR ferrule with 13.2mm bottom OD and 0.370" ID

Scorelines:
U-Groove; 0.75mm wide x 0.2mm deep x 2.6mm spacing; CNC Machined

Loft/Lie Bending:
+/-4° in any direction

Hosel Weight Bore:
up to 9g

Hosel Length / Bore Dia. / Bore Depth:
60mm / 0.370" parallel / 30mm

Sole Width at Toe/Heel:
#4-iron: 19mm/15mm
#7-iron: 20mm/16mm
PW: 20.5mm/16.5mm

Toe/Heel Leading Edge Radius:
300mm Radius for all 771CSI Irons

Face to Back Sole Radius:
60mm Toe/40mm Heel

Bottom of Bore to Ground:
771CSI = 1.5"

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	RH/LH
771-4	4-iron	23°	59°	246g	6mm	3°	57.5mm	35.5mm	82mm	RH/LH
771-5	5-iron	26	60	253	5	3	58.5	36.5	82	RH/LH
771-6	6-iron	30	61	260	5	4	59	36.5	82	RH/LH
771-7	7-iron	34	62	267	4	4	59.5	37	82	RH/LH
771-8	8-iron	38	63	274	4	4	60	37.5	82	RH/LH
771-9	9-iron	42	64	281	3	5	61	38	82	RH/LH
771-PW	PW	46	64	283	3	5	61	38	82	RH/LH
771-AW	AW	50	64	283	3	5	61	38	82	RH

771CSI IRONS

#4-PW, AW

LEFT HAND AVAILABLE IN #4-PW

OFFERS A WIDE RANGE IN LIE AND LOFT FITTING...
FOR CUSTOM FITTING

771CSI perform well with S2S White (p. 70)
& S2S Black 85 Iron Shafts (p. 68)

PROGRESSIVE CAVITY BACK & MUSCLE BACK

FORGED DESIGNS WITH EACH BACK DESIGN FORMED BY CNC MACHINING

Compact Traditional Profile

- Progressive CNC machined 575MMC cavity back created in a full, #3 to 9,PW,AW set makeuk.
- Progressive cavity back design moves weight from lower on the long irons to higher on the short irons
- Progressive CNC machined 575MMC muscle back designed in a #5 to 9, PW, AW set makeup.
- Progressive milled muscleback design moves weight higher on the back through the wedges
- 575MMC set expansion allows each version to be played as a full set or in mix and match set makeup option
- More compact head size with shorter blade length offers the compact look in the playing position desired by more traditional minded players
- All new CNC machining pattern results in a beautiful milled surface finish – a truly unique look to match the solid feel of a soft 1035C carbon steel forged iron design
- CNC machined scorelines under 2010 USGA and R & A rule guidelines



Head Material:
Forged 1035C Carbon Steel

Ferrule Required:
Yes, Iron model 125-IR

Scorelines:
U-Groove; 0.75mm wide x 0.4mm deep x 2.6mm spacing; CNC Machined

Loft/Lie Bending:
+/-4° in any direction

Hosel Lgth/Bore Dia./Bore Depth:
60mm / 0.370" parallel / 30mm

575MMC CB Sole Width at Toe/Heel:
#5-iron: 19mm/14.5mm
#7-iron: 20mm/15mm
PW: 21mm/16mm

575MMC MB Sole Width at Toe/Heel:
#5-iron: 16mm/13mm
#7-iron: 17mm/14mm
PW: 18mm/15mm

Toe/Heel Leading Edge Radius (Both CB and MB):
#4 to 7 = 250mm Radius
#8 to AW = 200mm Radius

Face to Back Sole Radius:
#4 to 7 = 40mm/30mm Radius
#8 to AW = 60mm/50mm Radius

Hosel Weight Bore:
Up to 9g

Bottom of Bore to Ground:
575MMC CB & MB = 1.5"

CAVITY BACK IRONS

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	RH/LH
575-CB-4	4-iron	23	59.5	246	2	2	53	30	77	RH
575-CB-5	5-iron	26	60	253	2	3	54	31	77	RH
575-CB-6	6-iron	30	61	260	2	3	55	32	77	RH
575-CB-7	7-iron	34	62	267	2	4	55.5	32.5	77	RH
575-CB-8	8-iron	38	63	274	2	4	56	33	77	RH
575-CB-9	9-iron	42	64	281	2	5	57.5	34	77	RH
575-CB-PW	PW	46	64	284	2	5	59	35	77	RH

MUSCLE BACK IRONS

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	RH/LH
575-MB-5	5-iron	26°	60	253	2mm	3	52mm	30mm	77mm	RH
575-MB-6	6-iron	30	61	260	2	3	53	31	77	RH
575-MB-7	7-iron	34	62	267	2	4	54	31.5	77	RH
575-MB-8	8-iron	38	63	274	2	4	55	32	77	RH
575-MB-9	9-iron	42	64	281	2	5	56	33	77	RH
575-MB-PW	PW	46	64	284	2	5	57	34	77	RH
575-MB-AW	AW	50	64	284	2	5	57	34	77	RH

Cavity Back 5-Iron
& Muscle Back 8-Iron

Cavity Back 5 Iron

MUSCLE BACK

CAVITY BACK

575MMC
FORGED IRONS

CAVITY BACK: #4-9, PW

MUSCLE BACK: #5-9, PW, AW

AVAILABLE FOR MIX AND MATCH SET MAKEUP...
OR IN FULL SET CAVITY OR MUSCLE BACK OPTIONS

ENHANCED ON-CENTRE IMPACT FEEL, SUPERB OFF CENTRE HIT FORGIVENESS FOR A PREMIUM FORGED TRADITIONAL IRON DESIGN

- Wishon Golf's 565 Series forged iron adds a more solid on-center feel to the best off-center forgiveness in a forged carbon steel iron
- New center cavity half-moon weighting increases on-center impact feel while offering a very slight increase in shot trajectory
- Low-offset design also features a thin top line
- Completely CNC machined back cavity ensures precise CG position for each head number with a beautiful cosmetic appearance
- Fully radiused tour grind type sole design – this is a model for scratch to middle handicap players
- Double nickel chrome pearl plated finish with glass bead blast highlights – CNC machined scorelines within 2010 USGA and R&A rule guidelines

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	RH/LH
565-3	3-iron	20°	58°	240g	2.5mm	2°	55mm	33mm	82mm	RH
565-4	4-iron	23	59	247	2.5	2	56	34	82	RH
565-5	5-iron	26	60	254	2	2	56.5	35	82	RH
565-6	6-iron	30	61	261	2	2	57	36	82	RH
565-7	7-iron	34	62	268	2	2	58	36.5	82	RH
565-8	8-iron	38	63	275	2	3	59	37	82	RH
565-9	9-iron	42	64	282	2	3	59.5	37	82	RH
565-PW	PW	46	64	285	1.5	5	60	38	82	RH
565-AW	AW	50	64	287	1.5	5	60	38	82	RH

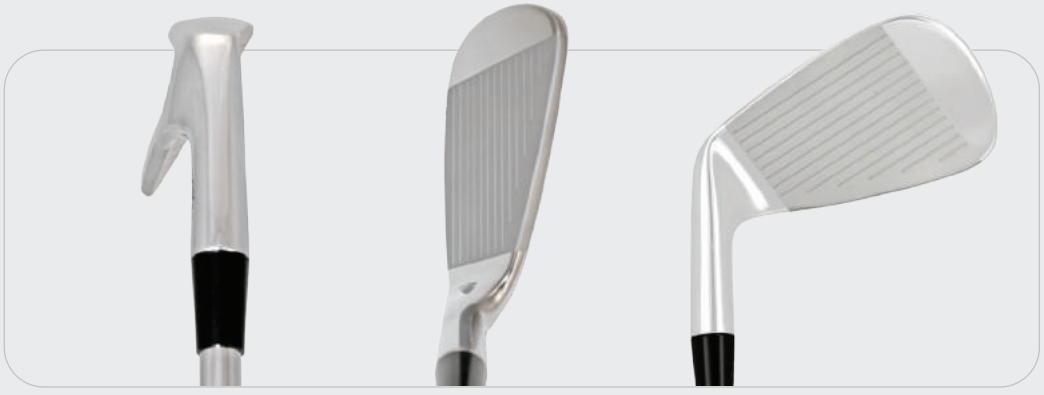

5-Iron Sole Radius | 6-Iron | 6-Iron Profile



Head Material:
Forged 1035C Carbon Steel

Ferrule Required:
Model #125-IR

Scorelines:
U-groove; 0.8mm wide X 2.6mm spacing X 0.4mm deep, CNC Machined, 2010 USGA and R&A Rules

Loft/Lie Bending:
+/-4° in any direction

Hosel Length:
60mm/30mm/0.370"

Hosel Weight Bore:
Up to 9g

Bore Depth:
30mm

Bore Diameter:
0.370"

Sole Width Range:
#3-iron: 17/18/15;
#6-iron: 17/18/15;
#9-iron: 20/20.5/16

Face to Back Sole Radius:
50mm T-C/40mm H

Toe/Heel Leading Edge Radius:
300mm R for all

Bottom of Bore to Ground:
565MC = 1.25"

FORGED CARBON STEEL CNC MACHINED DEEP BACK CAVITY

FOR THE HIGHEST MOI IN A TRUE FORGED IRON DESIGN

565MC

FORGED IRONS

#3-PW, AW

- Traditional sole, classic round profile shape stands as a truly superb overall shape with pleasing set –up behind the ball
- CNC Milled Face with Wishon Golf's proprietary Micro-Groove™ scorelines to maximize every golfer's ability to spin the ball. Tests with TrackMan® launch monitor verify a 1000rpm increase in spin rate compared to typical U-groove scorelines on a glass bead blast face
- Wishon Golf's proprietary Zero-Bounce heel grind ensures the leading edge of the face remains low to the ground when the face is opened for cut/finesse shots
- PCF Micro Pro wedges are produced in a durable satin nickel/chromium electroplated finish. Available in both RH and LH
- Conforms to 2010 USGA/R&A groove rules



Head Material:
Investment Cast 304 Stainless Steel (same HRB85 hardness as Carbon Steel)

Ferrule Required:
Any IR ferrule with 13.2mm bottom OD

Scorelines:
Micro-Groove U-shape, 0.6mm x 2.1mm x 0.4mm; CNC Machined

Loft/Lie Bending:
+/-4° in any direction

Hosel Weight Bore:
Up to 9g

Hosel Length/Bore Depth:
73mm/35mm

Bottom of Bore to Ground:
1 5/8" (41mm)

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	Sole Width T/C/H	Sole Radius T/H	RH/LH
308-52	PW	52°	64°	284g	1.6mm	6°/0°	59mm	35.5mm	80mm	18/19/14	275mm R	RH/LH
308-56	SW	56°	64°	300g	1.6mm	12°/0°	59.5mm	35.5mm	80mm	19/20/14.5	250mm	RH/LH
308-60	LW	60°	64°	294g	1.6mm	8°/0°	59.5mm	35.5mm	80mm	19/20/14.5	250mm	RH/LH

A UNIQUE RE-DESIGN OF WISHON'S BESTSELLING WEDGE MODEL
WITH TRADITIONAL SOLE AND CLASSIC ROUND PROFILE

PCF
MICRO PRO WEDGES

52° (PW), 56° (SW), 60° (LW)

LEFT HAND AVAILABLE IN 52°, 56°, 60°

CNC Milled Face with
Wishon Golf's Proprietary
Micro-Groove™ Scorelines

CLASSIC TEAR-DROP PROFILE SHAPE

WITH THE MOST VERSATILE SOLE DESIGN IN THE GAME

- The popular HM Series wedges feature a unique custom sole grind to increase playability for more types of wedge shots
- Zero Bounce heel grind removes the bounce from the heel end of the sole for more consistency when the face is opened to hit finesse and cut shots
- Front sole Knock Down grind allows golfers to more easily play low, driving, hands forward shots without digging the leading edge into the ground
- Center to rear sole grind offers conventional bounce for normal shots from all lie conditions
- Beautiful pearl NiCr plated finish over the 8620 carbon steel body offers a soft feel with a long lasting appearance. Available in RH in 52* AW, 56* SW and 60* LW



Head Material:
Investment Cast 8620 Carbon Steel

Ferrule Required:
Any 0.370" IR ferrule with 13.2mm bottom OD

Scorelines:
Micro-Groove U-shape, 0.6mm x 2.3mm x 0.4mm; Horizontal Milled

Loft/Lie Bending:
+/-4° in any direction

Hosel Length:
60mm

Hosel Weight Bore:
Up to 9g

Hosel Length/Bore Depth/ Bore Diam:
65mm/30mm/0.370"

Bottom of Bore to Ground:
Micro-Groove HM = 1.5"

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	Sole Width T/C/H	Sole Radius T/H	RH/LH
304-AW	AW	52°	64°	283g	2mm	6°	60mm	36.5mm	82mm	18/20/13	70mm/50mm	RH
304-SW	SW	56°	64°	296g	2mm	12°	61mm	38mm	82mm	19/21/14	70mm/50mm	RH
304-LW	LW	60°	64°	292g	2mm	10°	60.5mm	37mm	82mm	18.5/20.5/14	70mm/50mm	RH

MICRO-GROOVE

HM WEDGES

52° (AW), 56° (SW), 60° (LW)

Micro-Groove Hm
Low Offset Design

FIND A CLUBFITTER

Wishon Golf is dedicated to promoting our clubfitters
and clubmakers around the world.

Our online Find A Clubfitter map ensures that golfers can find
their closest Wishon clubfitter, wherever they are in the world.

If you are not listed on our map, or would like to update your listing,
you can do so anytime by emailing findme@wishongolf.com

wishongolf.com/find-a-clubfitter

WishonGolf



Head Material:
Investment Cast 304 Stainless Steel (The same HRB85 hardness as Carbon Steel)

Ferrule Required:
Any iron ferrule with 13.2mm bottom OD

Scorelines: Micro-Groove™ U-shaped, 0.6mm x 2.0mm x 0.4mm; CNC Machined

Loft/Lie Bending:
+/-4° loft or lie

Hosel Weight Bore:
Up to 9g

Hosel Length/Bore Depth:
65mm/35mm

Bottom of Bore to Ground:
PCF Wedges = 1.5"

PCF

WIDE SOLE WEDGE

55° (SW)

Low Bounce
Wide Sole Design

- Unique 2-piece design construction allows game improvement wide sole with traditional head profile at normal headweights
- The wide sole is designed with very low bounce – the perfect match of sole angle and width for game improvement. If you put the traditional amount of bounce on a wide sole, the leading edge will be too far up in the air and can cause bladed shots
- Wide sole designed for game improvement – perfect for golfers who have struggled to get the ball out of the sand or hit consistently from tall grass around the green

Head	Desc	Loft	Lie	Weight	Offset	Sole Angle	Toe Height	Heel Height	Blade Length	Sole Width T/C/H	Sole Radius T/H	RH/LH
306WS-55	SW	55°	64°	300g	2mm	5°	58.5mm	35mm	80mm	28.5/32/23.5	275mm R	RH

WEDGE

SHAFTS

- Wishon Golf has created a pair of custom designed steel wedge shafts for golfers who desire a custom flight and feel option in their wedges
- High Flight wedge shaft is designed with a longer tip parallel section to allow a slightly higher, softer landing shot into the green
- Knock Down wedge shaft is designed with a very short parallel tip section to restrict the bending of the tip to allow golfers to hit knock-down shots with a firmer feel on a more driving trajectory



Shaft	Description	Butt Dia.	Tip Dia.	Wgt	Length	Tip Trim	Butt Trim
605-WG-KD	Knock Down Wedge Shaft	0.580"	0.370"	105g	36"	0"	To length
605-WG-HF	High Flight Wedge Shaft	0.580	0.370	125	42	0	To length

"JUST A FABULOUS SET FOR AVERAGE TO HIGHER HANDICAP WOMEN OR MEN WITH SUB-80 SWING SPEEDS"

GREG MACCARTHY, BOGEY FREE GOLF

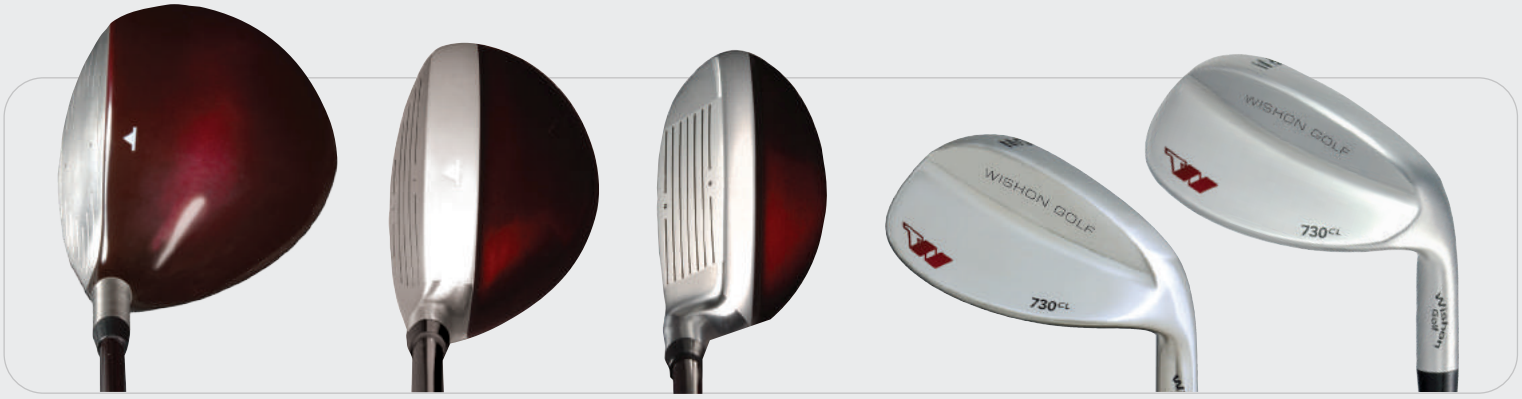

- Game improvement set concept designed expressly for golfers with a driver swing speed of 80mph or lower
- Matching S2S Ruby Lite graphite shafts for sub-80mph swing speed golfers, in discrete AA and A flexes
- Loft increments are designed at 6° between clubs – perfect for slower swing speed golfers to achieve normal 10-12 yard distance increments between each club
- Available in RH in 16° driver, 20° and 26° fairway woods, 30°, 36°, 42° hybrid irons and 48° and 54° wedges

730CL Driver:

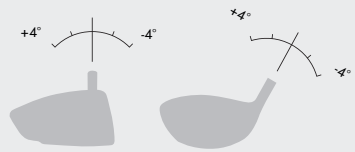

Ferrule Required:
730CL Driver:
Any 0.335" Wd-Ti ferrule
730CL Fairways/Hybrids:
Any 0.335" Wd-Std ferrule
730CL Wedges:
Any 0.370" IR ferrule

DRIVER

Head	Desc.	Volume	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	Face Prog.	Bore Diam.	RH/LH
730-1	Driver	400cc	16°	56°	1 closed	205g	13"	GRT	17.5mm	.335"	RH

FAIRWAY WOODS

Head	Desc.	Volume	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	Face Prog.	Bore Diam.	RH/LH
730	LONG Fairway	130cc	20°	56°	0.5 closed	218g	14"	0 Roll	12mm	.335"	RH
730	HIGH Fairway	125	26	57	0.5 closed	228	16	0 Roll	12	.335	RH

HYBRIDS & WEDGES

Head	Desc.	Static Loft*	Lie	Weight	Offset	Sole Angle	Face Hgt.	Toe Hgt.	Heel Hgt.	Blade Length	Bore Diam.	RH/LH
730-5	5-Hybrid	30°	60°	254g	–1mm	0°	34mm	–	–	78mm	.335"	RH
730-6/7	6/7-Hybrid	36	61	270	–2	0	37	–	–	78	.335	RH
730-8/9	8/9-Hybrid	42	62	283	–3	0	43	–	–	78	.335	RH
730-PW	PW	48	63	290	4	4	59	–	–	78	.370	RH
730-DW	DW	54	63	300	4	14	60	–	–	78	.370	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

Matches with S2S Ruby Lite Graphite Shaft (p. 67) & Wishon Burgundy Grip (p. 81)

730CL Driver features Bendable Hosel for Wider Lie & Face Angle Fitting Options

730CL SET

- DRIVER
- LONG & HIGH FAIRWAY
- HYBRID IRONS
- PW & DW

A POPULAR FULL SET DESIGN...

EXPRESSLY FOR WOMEN, MEN OR JUNIOR GOLFERS
WITH A DRIVER SWING SPEED NO HIGHER THAN 80MPH

730CL set delivers more driver distance and more functional distance gaps for slower swing speed golfers than conventional set makeup

- Future Pro stainless steel wood and ironheads offer a quality alternative to cheap aluminum and zinc heads at a "parent friendly", economical price
- Future Pro wood and ironheads are designed with Wishon's hosel weight bore to allow proper weight fitting – Stainless Steel ironheads are easily bent for junior lie and loft fitting
- Designed primarily for junior players, ages 6 to 11, with increased loft to ensure early shotmaking success in the game
- Optional future pro steel or graphite shafts allow clubmakers a wider range for shaft fitting and price consideration to the parents
- Future Pro dark blue finished stainless steel woodheads available in #1 (15°), #3 (20°), #5 (25°)
- Mirror polish stainless steel ironheads available in #5 (32°), #7 (40°), #9 (48°), DW (54°)
- Classic heel and toe weighted putter design for juniors
- Graphite Wood & Iron Shafts and Steel Iron Shaft
- Junior Swing Grip and Putter Grip also available

JUNIOR WOODHEADS

Head	Desc.	Volume	Static Loft*	Lie	Face Angle	Weight	Bulge	Roll	RH/LH
805-1	Driver	250cc	15°	52°	0.5 hook	195g	12"	15"	RH
805-3	3-wood	130	20	53	0.5 hook	204	14	16	RH
805-5	5-wood	130	25	54	0.5 hook	213	14	16	RH

*Wishon Golf measures the real static loft of all drivers, fairway woods and hybrids in the soled position of the clubhead on the base of the industry standard specifications measurement gauge.

JUNIOR IRONS AND PUTTER

Head	Desc.	Loft	Lie	Weight	Offset	Sole Angle	RH/LH
855-5	5-Iron	32°	58°	248g	4mm	2°	RH
855-7	7-Iron	40	60	262	4	2.5	RH
855-9	9-Iron	48	62	276	3	3	RH
855-DW	Dual Wedge	54	62	284	3	7	RH
255-PTR	Putter	3	72	335	N/A	N/A	RH

JUNIOR GRAPHITE WOOD & IRON SHAFTS

Head	Desc.	Flex	Weight	Torque	Butt Diam.	Tip Diam.	Raw Length	Swing Speed
605-JR-Wood	Wood Shaft	Jr	70g	5.5°	0.500"	0.335"	40"	<50mph
605-JR-Iron	Iron Shaft	Jr	70	5	0.500	0.370	37	<50

JUNIOR STEEL IRON SHAFTS

Head	Desc.	Flex	Weight	Torque	Butt Diam.	Tip Diam.	Raw Length	Swing Speed
605-STEEL-JR-IR	Iron Shaft	Jr	90	3.3	.500	0.370	35	<50

Head Material- Woodheads:
17-4 Stainless Steel

Head Material- Ironheads:
431 Stainless Steel

Ferrule Required:
1) Driver/Fwys –
any Wd-Std ferrule
2) Irons/Wedge –
any IR ferrule

Bore Depth:
30mm in both the Wood and Ironheads

Loft/Lie Bending:
Yes, +/- 2 to 3° in any direction for the Irons and Wedge

Bore Diameter:
0.335" Woodheads; 0.370" Ironheads

Hosel Weight Bore:
up to 9g

Bottom of Bore to Ground:
FP Driver = 1.75"
FP Fairways = 1.25"
FP Irons = 1.5"

FUTURE PRO

JUNIOR SET

- DARK BLUE FINISH STAINLESS STEEL WOODHEADS #1, 3. 5
- MIRROR POLISH STAINLESS STEEL IRONHEADS #5, 7, 9, DW
- HEEL/TOE JUNIOR PUTTER
- GRAPHITE WOOD & IRON SHAFTS
- STEEL IRON SHAFT
- SWING & PUTTER GRIPS

STAINLESS STEEL CLUBHEADS, GRAPHITE OR STEEL SHAFTS

OFFERS HIGHEST QUALITY FOR JUNIOR GOLFERS

WISHON'S UNIQUE COLLECTION OF QUALITY PUTTER DESIGNS

- Open Cavity Design in each putter allows higher MOI for superb off centre hit peformance
- Three Mallet style designs with different alignment aid options to fit a wide range of golfers
- The Cavity Black Heel/Toe Model is oversize for easier alignment and higher MOI
- Black Oxide finish with striking red and bead blast highlights
- All models available in RH; Models 1 and 3 are available in LH.

Head Material:
17-4 Stainless Steel

Method of Mfg:
Investment Cast

Ferrule Required:
No

Bore Diameter:
For all Putters - 0.370" parallel

Loft/Lie Bending:
For Models 1, 2, 4 - +/-2° in all directions by hosel
For Model 3 – Loft/Lie bending has to be done on the shaft

CB-1

CB-2

CB-3

CB-4

CB-1

CB-2

CB-3

CB-4

Head	Loft	Lie	Weight	Face Height	Head Length	Face Prog.	Shaft to Use	MOI	RH/LH
TWCB-1	3°	71°	355g	25mm	122mm	-4.5	Straight	5,596 g-cm2	RH/LH
TWCB-2	4°	72°	365g	23mm	99mm	-4.0	Straight	4,920 g-cm2	RH
TWCB-3	3°	90°*	350g	22.5mm	82mm	4.0**	Single Bend/ Offset Double Bend	4,368 g-cm2	RH/LH
TWCB-4	3°	72°	380g	24.5mm	85mm	-4.5	Straight	5,384 g-cm2	RH

**90° Bore requires single bend or offset double bend putter shaft with the lie bent into the shaft.*
***Face Progression of +4.0mm is based on measurement with a single bend shaft installed. When using a double bend shaft, face progression is determined by the shaft's second bend.*

CB-1

CB-2

CB-3

CB-4

CAVITY BLACK

PUTTERS

ALL MODELS AVAILABLE IN RH

MODELS 1 & 3 AVAILABLE IN LH

PUTTER

FITTING ELEMENTS

- Length - Golfer's arms extended but relaxed with no tension or stretching out of the arms.
- Loft - Hands ahead at impact - putter loft 5° to 6°; Hands in line with the ball at impact - putter loft 4°; Hands behind ball at impact - putter loft 2° to 3°.
- Lie - Putter head must sit flat on its sole touching the ground in the center of the sole.
- Weighting - Finding the right amounts of weight in the head AND counterweights in the butt end of the shaft typically have to be found by experimentation with a test putter.
- Grip Style/Size - Each golfer has to experiment with different putter grip styles and sizes to find their own best feel and comfort. We recommend to keep grip samples on shafts in your shop.

TOUR LOCK COUNTERWEIGHTS

Many golfers have achieved a much higher level of putting consistency using a heavy counterweight in the butt-end of the shaft. Great for golfers who suffer from distance control. Easy to install through the end of any rubber grip with the installation cutting tool. Locks securely in place with hex wrench. Can be easily changed, removed anytime.

Sold individually or in a handy Kit Form with one of each weight plus installation tool and hex wrench. Individual installation tools and hex wrenches also available.

ITEM #	WEIGHT	FOR
#TW116-12	12g	Full Clubs
#TW116-20	20g	Full Clubs
#TW116-30	30g	Full Clubs
#TW116-40	40g	Full Clubs
#TW116-60	60g	Putters
#TW116-80	80g	Putters
#TW116-100	100g	Putters
#TW116-KIT	One of Each Weight + Wrench & Tool	
#TW116-HEXWRENCH		Securing weights
#TW116-TOOL		Installing weights

PUTTER SHAFTS

See Diamond Golf Catalogue for full range of Putter Shafts from a wide variety of shaft manufacturers.

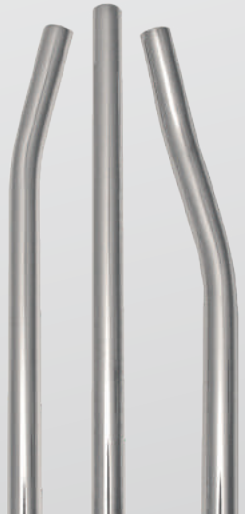

PUTTER GRIPS

Super Jumbo Putter Grip

Mid Size Putter

Grip Name	Model #	Grip Size/Color	Upper Hand Dia. (2")	Lower Hand Dia. (6")	Wgt.	Core
Super Jumbo Putter Grip	405-SUP-JBO	Super Jumbo-Red/Black	1.5"	1.5"	80g	0.600"
Mid Size Putter	404-PTR-MIDSIZE	Mid Size Red/Blk	1.12"	1"	110g	0.600"

GRAPHITE AND STEEL SHAFTS CUSTOM DESIGNED BY
WISHON GOLF TO SPECIFIC GOLFER SWING CHARACTERISTICS

WHITE GRAPHITE

S2S White has a medium tip section to better fit golfers with an average to slightly above average transition/tempo with a midway release

GREEN GRAPHITE

For the less skilled to average golfer with a smoother to average transition/tempo with an early to early-midway release

BLUE GRAPHITE

S2S Blue shafts are designed for golfers who need the lightest total weight - women, seniors and anyone who prefers a lighter feel

RUBY LITE GRAPHITE

Designed to match to the model 730CL clubheads for slower swing speed players

BLACK GRAPHITE

For the better than average to good player with an average to above average transition/tempo with a late-midway to later release

RED GRAPHITE

For the most aggressive swing golfer with a late to very late release for more control and stability through impact

SUPERLITE STEEL

The Superlite is for players with an average to slightly above average transition and tempo with a release from slightly before midway to slightly later than midway

SMOOTH STEEL

S2S Smooth is designed for stronger golfers with an above average to forceful/fast transition and tempo with a later to very late release

HOW TO FIT GOLFERS WITH THE BEST S2S SHAFT DESIGN...

1. Measure the clubhead speed of the golfer. Driver/3 wood speed for wood shaft fitting; 5- or 6-iron speed for iron and hybrid shaft fitting.
2. Evaluate the golfer's downswing transition move to start the downswing as smooth (1), average (2), or forceful/aggressive (3).
3. Evaluate the golfer's downswing tempo/acceleration as smooth (1), average (2), aggressive (3).
4. Identify the point in the downswing when the golfer unhinges the wrist-cock angle as early (1), midway (2), or late (3).
5. Evaluate the golfer's physical strength as below average (1), average (2), or well above average (3).
6. Log on to **www.wishongolf.com** to access the free Wishon Golf S2S Shaft Fitting Software. Enter each of the golfer inputs for wood and iron clubhead speed and the evaluations for the golfer's transition, tempo, release and strength. Click "Make Shaft Recommendation" to determine the best Wishon custom designed S2S Fitting System wood shaft, graphite iron shaft, steel iron shaft, hybrid shaft along with any required trimming adjustments to properly fit the golfer.

Each custom designed S2S shaft includes the designed clubhead speed range and the golfer's transition, tempo, release and strength ratings for which the shaft is designed.

SWING SPEED (MPH)

DRIVER/3W SWING SPEED FOR WOOD SHAFTS

5-IRON/6-IRON SWING SPEED FOR IRON SHAFTS

SHAFT FLEX

SHAFT WEIGHT

DOWNSWING TRANSITION

1 = SMOOTH
2 = AVERAGE
3 = FORCEFUL

DOWNSWING TEMPO

1 = SMOOTH
2 = AVERAGE
3 = AGGRESSIVE

WRIST-COCK RELEASE

1 = EARLY
2 = MIDWAY
3 = LATE

GOLFER STRENGTH

1 = BELOW AVERAGE
2 = AVERAGE
3 = ABOVE AVERAGE

S2S

ONLINE FITTING SYSTEM

Wishon's S2S Shaft Fitting software is free and easy to use. Go to **wishongolf.com**, click on the link for Clubmakers and find the link to the S2S Shaft Fitting software on the left side of the page.

Enter the golfer's wood and iron swing speeds, select the golfer's Transition/Tempo/Release/ Strength ratings then click on "Make Shaft Recommendation." Not only does the program recommend the exact S2S shaft designs for the golfer's wood, graphite iron, steel iron and hybrid shaft but it also indicates if the golfer needs a custom tip trim on any of the recommended shafts.

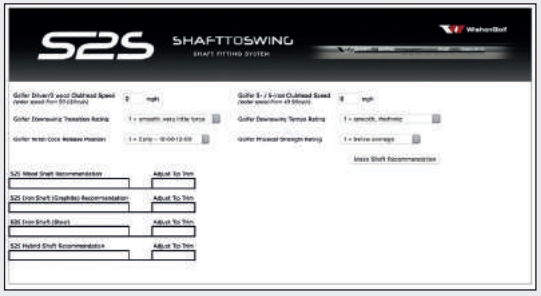

S2S SHAFT MODEL	TRANSITION	TEMPO	RELEASE	STRENGTH
S2S GREEN	SMOOTH/EASY TO AVERAGE	SMOOTH/EASY TO AVERAGE	EARLY TO EARLY-MIDWAY	BELOW AVERAGE TO AVERAGE
	1 TO 2	1 TO 2	1 TO 2	1 TO 2
S2S WHITE	AVERAGE TO SLIGHTLY ABOVE AVG	AVERAGE TO SLIGHTLY ABOVE AVG	AROUND MIDWAY	AVERAGE (63G) TO ABOVE AVERAGE (83G)
	2 TO 2.25	2 TO 2.25	1.75 TO 2.25	1 TO 3
S2S BLACK	AVERAGE TO ABOVE AVG	AVERAGE TO ABOVE AVG	MIDWAY TO LATER	AVERAGE (65G) TO ABOVE AVG (85G)
	2 TO 2.5	2 TO 2.5	2 TO 2.5	2 TO 3
S2S RED	ABOVE AVG TO FORCEFUL	ABOVE AVG TO FAST, QUICK	LATER TO VERY LATE	AVERAGE TO SLIGHTLY ABOVE AVG
	2.5 TO 3	2.5 TO 3	2.5 TO 3	2 TO 2.5
S2S BLUE	SMOOTH/EASY TO AVERAGE	SMOOTH/EASY TO AVERAGE	AROUND MIDWAY (AA & A) MIDWAY TO LATER (R & S)	BELOW AVERAGE TO AVERAGE
	1 TO 2	1 TO 2	1.75-2.25 (AA & A)	1 TO 2
			2 TO 2.5 (R & S)	
S2S RUBY LITE	SMOOTH/EASY TO AVERAGE	SMOOTH/EASY TO AVERAGE	EARLY TO EARLY-MIDWAY	BELOW AVERAGE TO AVERAGE
	1 TO 2	1 TO 2	1 TO 1.5	1 TO 2
S2S SMOOTH STEEL	AVERAGE TO FORCEFUL	AVERAGE TO FAST, QUICK	LATER TO VERY LATE	ABOVE AVERAGE
	2 TO 3	2 TO 3	2.5 TO 3	2.5 TO 3
S2S SUPERLITE STEEL	AVERAGE TO SLIGHTLY ABOVE AVG	AVERAGE TO SLIGHTLY ABOVE AVG	AROUND MIDWAY	AVERAGE TO SLIGHTLY ABOVE AVG
	2 TO 2.25	2 TO 2.25	1.75 TO 2.25	2 TO 2.5

Note: Please note the transition, tempo, release and strength fitting evaluations may be a little different for some S2S shaft designs from previous years. This represents slight bend profile design adjustments made in some models as well as from Wishon Golf's ongoing shaft fitting research.

FOR THE LESS SKILLED TO AVERAGE GOLFER

WITH A SMOOTH TO AVERAGE/TEMPO WITH AN EARLY TO MIDWAY RELEASE

- S2S Green graphite shafts are available in both woods and irons, in both an A/L and R/S combination flex to fit a wide range of golfers with smooth to average swing characteristics
- S2S Green golfer type – driver swing speeds from 50-90mph, smoother to average transition force, slower to average tempo, early to midway release
- Combination flex design offers more versatility for custom trimming to achieve "in between" flex fitting requirements, and to keep inventory levels lower in the shop
- No flex letters are printed on the A/L shafts to allow "vanity" fitting for golfers who need a more flexible shaft but do not want others to know what flex they are using. Regular/ Stiff is printed on the R/S combination flex S2S Green shafts

S2S GREEN

GRAPHITE WOOD & IRON SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
1 TO 2	1 TO 2	1 TO 2	1 TO 2

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	Swing Speed	Bend Profile Design (cpm/454g tip weight) 41″	36″	31″	26″	21″	16″	11″
650-WD-A/L	Cut to L Flex Wood	66g/62g	0.580″/0.335″	4.5*	46″	22″	50-60mph (1w)	148	166	190	230	290	410	710
	Cut to A Flex Wood		0.580″/0.335″				60-70mph (1w)	156	175	199	239	310	435	725
650-WD-R/S	Cut to R Flex Wood	67g/63g	0.600″/0.335″	4.3*	46″	21.8″	70-80mph (1w)	164	184	208	248	330	460	740
	Cut to S Flex Wood		0.600″/0.335″				80-90mph (1w)	172	193	217	257	350	485	765
650-IR-A/L	Cut to L Flex Iron	65g/62g	0.580″/0.370″	4.0*	41″	20″	40-50mph (5i)		182	215	255	320	450	730
	Cut to A Flex Iron		0.580″/0.370″				50-60mph (5i)		189	223	262	335	460	745
650-IR-R/S	Cut to R Flex Iron	66g/63g	0.600″/0.370″	3.9*	41″	19.8″	60-70mph (5i)		196	231	270	350	470	760
	Cut to S Flex Iron		0.600″/0.370″				70-80mph (5i)		203	239	278	365	480	775

See pages 78-79 for Shaft Trim Charts. S2S Green AA (L) & A Woods – Chart B; S2S Green R & S Woods – Chart B; S2S Green AA (L) & A Irons – Chart D; S2S Green R & S Irons – Chart D.
Balance Point Measured from Butt End down.

730CL SET - p.24

PERFECTLY MATCHES WITH THE 730CL SET

FOR GOLFERS WITH SWING SPEED UNDER 80MPH

- Very butt soft and very tip soft bend profile designed in discrete AA (L) and A flexes for golfers of less than 80mph swing speed with a smooth, passive transition/tempo and early to midway release. S2S Ruby Lite wedge shaft remains as a combination A/AA flex design
- S2S Ruby Lite hybrid iron shafts designed with a 0.335″ tip diameter to ensure a high launch and superb performance for the 730CL hybrid iron clubs
- S2S Ruby Lite is more butt flexible and significantly more tip flexible than the former 730CL graphite shafts – a perfect re-design for the sub-80mph golfer with smooth and passive downswing force in their swing

S2S RUBY LITE

GRAPHITE WOOD, HYBRID/IRON & WEDGE SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
1 TO 2	1 TO 2	1 TO 2	1 TO 2

Shaft	Flex	Shaft Type	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	Swing Speed	Bend Profile Design (cpm/454g tip weight)						
									41″	36″	31″	26″	21″	16″	11″
630-WD-AA	AA	Wood	65g/61g	0.590/0.335″	5.5°	44″	21.55″	45–60mph	140	160	185	225	280	400	680
630-WD-A	A	Wood	67/63	0.590/0.335	5.0	44	21.65	60–75	151	170	200	240	300	425	705
630-IR-AA	AA	Hybrid Iron	68/65	0.590/0.335	4.5	39	19.2	40–50	X	188	215	256	320	455	760
630-IR-A	A	Hybrid Iron	70/67	0.590/0.335	4.2	39	19.0	50–60	X	200	227	270	340	480	790
630-WG-A/L	A/AA	Wedge	75/72	0.590/0.370	4.5	36	18.0	40–60	X	X	223	263	333	460	790

See page 78-79 for Shaft Trim Charts. S2S Ruby Lite Woods (all flexes) – Chart B; S2S Ruby Lite Hybrid Irons (all flexes) – Chart E;
S2S Ruby Lite Wedge (combo flex) – See Note Under Chart E; Balance Point measured from Butt End.

S2S BLACK

GRAPHITE WOOD, IRON & HYBRID SHAFTS

BLACK GRAPHITE WOOD & IRON SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
2 TO 2.5	2 TO 2.5	2 TO 2.5	2 TO 3

BLACK GRAPHITE HYBRID SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
2 TO 2.5	2 TO 2.5	2 TO 2.5	2 TO 3

- S2S Black has a slightly stiffer tip section to better fit golfers with an average to above average transition/tempo with a release that can be from midway to late
- The slightly stiffer tip section is created to allow the S2S Black to offer more stability at impact, but not so tip stiff that it cannot be a good choice for the slightly more aggressive player with a midway release
- S2S Black graphite shafts are available for woods and irons in R and S flexes to fit driver swing speeds from 60mph up to 100mph, and iron swing speeds from 55mph to 85mph
- S2S Black wood shafts are designed in both 65g and 85g versions; 65g to offer the average transition/tempo player his ideal total weight, 85g to give the stronger player a heavier total weight for better swing repeatability
- S2S Black iron shafts are designed to allow the better player to move into graphite for the irons to lower the total weight but still get the firm tip performance and feel he was used to in a players' steel iron shaft
- S2S Black hybrid shafts for players with a semi-late to late release with above average transition and tempo force and above average strength

FOR PLAYERS WITH BETTER THAN AVERAGE TO GOOD SWING CHARACTERISTICS

WITH AN AVERAGE TO MORE AGGRESSIVE DOWNSWING MOVE AT THE BALL

BLACK 65 & 85 GRAPHITE WOOD SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	Dr Swing Speed	Bend Profile Design (cpm/454g tip weight)						
								41″	36″	31″	26″	21″	16″	11″
660-PRO-65-R	R	65g/61g	0.602/0.335	3.6°	46″	22″	85-100mph	168	188	224	275	350	500	825
660-PRO-65-S	S	65/61	0.605/0.335	3.4	46	22″	95-110mph	176	200	236	284	365	515	850
660-PRO-85-R	R	85/81	0.602/0.335	3.4	46	21.25	85-100mph	168	186	224	275	350	500	825
660-PRO-85-S	S	85/81	0.605/0.335	3.2	46	21.25	95-110mph	176	200	236	284	365	515	850
660-PRO-85-X	X	85/81	0.605/0.335	3.0	46	21.75	105-120mph	184	212	248	295	380	540	875

BLACK 85 GRAPHITE IRON SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
660-IR-R	R	85g/82g	0.602″/0.370″	3.2°	41″	20.75″	65-75	205	240	280	360	515	860
660-IR-S	S	85/82	0.602/0.370	3.0	41	20.75	75-85	216	260	305	390	545	900

See page 78-79 for Shaft Trim Charts. S2S Black 65/85 R, S and X flex Woods – Chart A; S2S Black R, S flex Irons – Chart C; Balance Point measured from Butt End.

BLACK GRAPHITE HYBRID SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
645-R	R	95g/92g	0.602″/0.335″	3.2	41	18.6	65-80	215	245	290	375	530	850
645-S	S	100/97	0.602/0.335	3.0	41	18.5	75-90	225	260	315	400	550	875

See page 78-79 for Shaft Trim Charts. S2S Black Hybrids (all flexes) – Chart E; Balance Point is measured from Butt End.

S2S WHITE

GRAPHITE WOOD, IRON & HYBRID SHAFTS

WHITE GRAPHITE WOOD & IRON SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
2 TO 2.25	2 TO 2.25	1.75 TO 2.25	1.75 TO 2

WHITE GRAPHITE HYBRID SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
2 TO 2.25	2 TO 2.25	1.75 TO 2.25	1.75 TO 2

- S2S White is Wishon Golf's most popular shaft for golfers with average swing characteristics: ideal for golfers with smooth to average tempo and average strength
- S2S White retains its popular bend profile design for average golfers, designed with a slightly stiffer lower tip section to offer more control through impact for tighter dispersion
- S2S White hybrid shafts are for average ability golfers who need a lighter weight hybrid shaft

DESIGNED FOR THE WIDEST RANGE OF GOLFERS

WITH AVERAGE SWING CHARACTERISTICS

WHITE GRAPHITE WOOD SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	Dr Swing Speed	Bend Profile Design (cpm/454g tip weight)						
								41″	36″	31″	26″	21″	16″	11″
610-WD-A	A	63g/59g	0.594″/0.335″	4.0*	45″	21.25″	60-75mph	155	180	211	251	321	450	750
610-WD-R	R	65/61	0.594/0.335	3.9*	45	21.25	75-90mph	165	192	224	268	340	465	775
610-WD-S	S	67/63	0.602/0.335	3.8*	45	21.25	90-105mph	175	204	238	281	359	485	800

WHITE GRAPHITE IRON SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
610-IR-A	A	74g/71g	0.594″/0.370″	3.7°	41″	20.5″	55–65mph	194	222	264	336	460	755
610-IR-R	R	77/74	0.598/0.370	3.5	41	20.4	65–75	205	235	279	355	475	775
610-IR-S	S	79/76	0.598/0.370	3.3	41	20.15	75–85	216	247	294	375	490	795

See page 78-79 for Shaft Trim Charts. S2S White A flex Woods – Chart B; S2S White R, S flex Woods – Chart A; S2S White A flex Irons – Chart D; S2S White R, S flex Irons – Chart C; Balance Point measured from Butt End.

WHITE GRAPHITE HYBRID SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
635-A	A	73/70	0.594/0.335	3.8	41	19.6	55-65	202	230	260	335	480	800
635-R	R	75/72	0.598/0.335	3.7	41	19.4	65-75	212	240	275	355	495	825
635-S	S	78/75	0.602/0.335	3.5	41	19.2	75-85	222	250	290	375	510	845

See page 78-79 for Shaft Trim charts. S2S White Hybrids (all flexes) - Chart E; Balance Point is measured from Butt End.

S2S RED

GRAPHITE WOOD, IRON & HYBRID SHAFTS

RED GRAPHITE WOOD & IRON SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH (W)	STRENGTH (I)
2.5 TO 3	2 TO 3	2.5 TO 3	2 TO 2.5	2 TO 2.5

RED GRAPHITE HYBRID SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
2.5 TO 3	2.5 TO 3	2.5 TO 3	2 TO 2.5

- S2S Red designed with a unique, different bend profile. The butt stiff/center soft/tip stiff design of the S2S Red offers the better player a high performance shaft for better control with solid, not too stiff feel
- S2S Red shafts are for golfers with an above average to forceful transition and average to fast tempo with a later to very late release to deliver more clubhead stability at impact for control and accuracy but without a "boardy stiff" feel
- Fitting difference between S2S Red and S2S Black – the S2S Red and the S2S Black shaft designs can both be played by any golfer with a later to very late release, but the S2S Red is a better fit for the golfer who is a little to a lot more forceful and aggressive on the downswing
- S2S Red iron shafts offer the same butt stiff/center soft/tip stiff design in a heavier >100g shaft weight for players who wish to switch from steel who are comfortable with a little heavier total weight in the irons
- S2S Red hybrid shafts for players with a very late release, with average to above average transition and tempo force with average strength

A UNIQUE STIFF BUTT/SOFT CENTRE/STIFF TIP DESIGN
FOR MORE AGGRESSIVE, LATE RELEASE PLAYERS TO PLAY STIFF
FOR CONTROL WITHOUT FEELING TOO STIFF

RED GRAPHITE WOOD SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	Dr Swing Speed	Bend Profile Design (cpm/454g tip weight)						
								41″	36″	31″	26″	21″	16″	11″
675-WD-R	R	65g/61g	0.602″/0.335″	3.6*	45″	20.8″	85-100mph	184	205	222	253	310	500	920
675-WD-S	S	66/62	0.606/0.335	3.4	45	20.8	95-110mph	192	215	235	272	336	525	965

See page 78-79 for Shaft Trim Charts. S2S Red R, S flex Woods – Chart A; S2S Red R, S flex Irons – Chart C;
Balance Point measured from Butt End.

RED GRAPHITE IRON SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
675-IR-R	R	105/101g	0.602″/0.370″	3.4*	41″	20.75″	75-85mph	217	240	275	330	510	950
675-IR-S	S	110/107	0.606/0.370	3.2	41	20.75	85-95mph	225	250	285	345	525	975

See page 78-79 for Shaft Trim Charts. S2S Red R, S flex Woods – Chart A; S2S Red R, S flex Irons – Chart C;
Balance Point measured from Butt End.

RED GRAPHITE HYBRID SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
675-HY-R	R	80g/77g	0.610/0.335	3.6°	41″	18.4″	70-80mph	220	245	270	350	480	875
675-HY-S	S	83/80	0.614/0.335	3.6	41	18.4	80-90	230	255	285	365	500	900

See page 78-79 for Shaft Trim Charts. S2S Red Hybrids (all flexes) – Chart E; Balance Point is measured from Butt End.

S2S BLUE

GRAPHITE WOOD, IRON & HYBRID SHAFTS

- S2S Blue 45 and 55 are the lightest weight shafts to offer light total weights for golfers with smooth/average transition/tempo
- S2S Blue iron shafts in AA, A and R flexes offer the lightest total weight of any iron shaft in the S2S shaft design line
- S2S Blue hybrid shafts are for average ability golfers who need the lightest total weight

BLUE 45 GRAPHITE WOOD SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
1 TO 2	1 TO 2	1.75 TO 2.25	1 TO 2

BLUE 55 GRAPHITE WOOD SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
1 TO 2	1 TO 2	2 TO 2.5	1 TO 2

BLUE 55 GRAPHITE IRON SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
1 TO 2	1 TO 2	1.75 TO 2.25	1 TO 2

BLUE 55 GRAPHITE HYBRID SHAFTS

TRANSITION	TEMPO	RELEASE	STRENGTH
1 TO 2	1 TO 2	1.75 TO 2.25	1 TO 2

S2S BLUE 45/55, THE LIGHTEST SHAFT FITTING OPTIONS

FOR DRIVERS, FAIRWAY WOODS, IRONS & HYBRIDS

BLUE 45 & 55 GRAPHITE WOOD SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	Dr Swing Speed	Bend Profile Design (cpm/454g tip weight)						
								41″	36″	31″	26″	21″	16″	11″
617-WD-AA	AA (L)	47g/43g	0.590″/0.335″	5.5°	45″	22.3″	50-65mph	145	165	190	230	290	410	715
617-WD-A	A	48/44	0.590/0.335	5.0	45	22.0	60-75mph	155	175	196	236	300	420	730
607-WD-R	R	55/51	0.600/0.335	4.2	46	23.75	75-90mph	165	185	216	263	331	445	750
607-WD-S	S	55/51	0.600/0.335	3.8	46	23.75	85-100mph	175	195	226	273	343	460	775

BLUE 55 GRAPHITE IRON SHAFTS

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
607-IR-AA	AA	54g/51g	0.594″/0.370″	4.8°	42″	21.25″	<55mph	182	212	260	330	450	760
607-IR-A	A	55/52	0.594/0.370	4.5	42	20.75	55-65	196	228	278	352	480	790
607-IR-R	R	56/53	0.598/0.370	4.2	42	21	65-75	210	245	298	374	500	815

See page 78-79 for Shaft Trim Charts. S2S Blue 45 Woods AA flex – Chart B; S2S Blue 45 A flex – Chart B; S2S Blue 55 Wood R, S flexes – Chart A; Blue 55 Iron AA Flex - Chart D; Blue 55 Iron A, R Flexes - Chart C. Balance Point measured from Butt End.

BLUE 55 GRAPHITE HYBRID SHAFTS

ITEM #	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
607-HYB-AA	AA	54/51	0.588/0.335	4.5	41	20.5	40-50	180	215	260	325	450	780
607-HYB-A	A	55/52	0.592/0.335	4.2	41	20.5	50-60	195	230	280	350	480	800
607-HYB-R	R	56/53	0.600/0.335	3.9	41	20.25	60-75	210	245	300	380	505	830

See page 78-79 for Shaft Trim charts. S2S Blue 55 Hybrids (all flexes); Balance Point is measured from Butt End.

WISHON'S MEDIUM WEIGHT STEPLESS STEEL IRON DESIGN

FOR BETTER THAN AVERAGE TO GOOD PLAYERS

S2S SMOOTH STEEL

STEEL IRON SHAFTS

- S2S Smooth Steel is designed for better players with above average strength and with stronger than average Transition force
- S2S Smooth Steel bend profile is ideal for golfers with a midway to very late release who also are average to above average in their transition force and tempo. Golfers with an early to midway release and smooth to average transition/tempo, who wish to play steel, should use the S2S Superlite steel iron shafts
- S2S Smooth Steel iron shafts are available in R and S flexes – 42″ raw length for the R flex and 40″ for the S flex to make it easier to keep the two flex versions from being mixed up due to the stepless design
- For 2019, the S2S Steel shaft models feature a smart modern screen print graphic replacing the traditional self-stick labels. Also included will be a self-stick plain black decal for flex designation

Self-stick label for flex designation

TRANSITION	TEMPO	RELEASE	STRENGTH
2 TO 3	2 TO 3	2.5 TO 3	2.5 TO 3

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g t3)					
								36″	31″	26″	21″	16″	11″
605-Stepless-R	R	120g/117g	0.602″/0.370″	3.0°	42″	20.5″	65-80	212	244	302	387	530	870
605-Stepless-S	S	115/112	0.602/0.370	2.9	40	19.5	75-90	220	260	317	405	550	900

See page 78-79 for Shaft Trim Charts. S2S Stepless R, S flexes – Chart C; Balance Point measured from Butt End.

S2S SUPERLITE STEEL IRON SHAFTS...

DESIGNED FOR GOLFERS WHO PREFER THE FEEL OF STEEL BUT IN A LIGHTER WEIGHT

S2S SUPERLITE

STEEL IRON SHAFTS

- S2S SuperLite steel designed to be more tip flexible than the S2S Stepless steel iron shafts for golfers with an earlier to midway release.
- Sub-100 gram weight of the S2S SuperLite steel iron shafts offers a lighter total weight but at a more economical price than other sub-100 gram steel shafts.
- S2S SuperLite steel designed for golfers with a slightly less forceful to average transition and tempo, who prefer the impact feel of a steel iron shaft over graphite.
- S2S SuperLite steel available in R and S flexes
- The S2S Steel shaft models feature a smart modern screen print graphic replacing the traditional self-stick labels. Also included will be a self-stick plain black decal for flex designation

Self-stick label for flex designation

TRANSITION	TEMPO	RELEASE	STRENGTH
2 TO 2.25	2 TO 2.25	1.75 TO 2.25	2 TO 2.5

Shaft	Flex	Raw/Cut Weight	Butt/Tip Diameter	Torque	Raw Length	Balance Point	5i Swing Speed	Bend Profile Design (cpm/454g tip weight)					
								36″	31″	26″	21″	16″	11″
605-Superlite-R	R	106g/103g	0.602″/0.370″	3.2°	42″	20″	65-75mph	213	255	318	380	505	775
605-Superlite-S	S	102/99	0.602/0.370	3.1	40	19	75-85	221	269	330	420	535	805

See page 78-79 for Shaft Trim Charts. S2S Superlite R, S flexes – Chart C. Balance Point measured from Butt End.

SHAFT TRIMMING

The following charts of the standard shaft trimming guidelines for all of the S2S Shaft to Swing fitting system designed shafts from Wishon Golf. These tip trimming guidelines may certainly be altered for custom fitting purposes for each golfer.

As always please check these trimming charts every year because we do adjust and change trimming guidelines for our shafts from year to year based on our ongoing research.

WOOD SHAFT TRIMMING

USE TRIM CHART A FOR WOOD SHAFTS:

WHITE	R, S Flexes
RED	R, S Flexes
BLACK 65	R, S Flexes
BLACK 85	R, S, X Flexes
BLUE 55	R, S Flexes

USE TRIM CHART B FOR WOOD SHAFTS:

GREEN	R Flex; (add 2″ to all entries for S Flex)
GREEN	AA (L) Flex; (add 2″ to all entries for A Flex)
WHITE	A Flex
BLUE 45	AA, A Flexes
RUBY LITE	AA, A Flexes

TRIM CHART A

Clubhead	Standard Tip Trim	Butt Trim
Driver	0″	To Length
2w	1/2″	To Length
3w	1″	To Length
4w	1 1/2″	To Length
5w	2″	To Length
7w	2 1/2″	To Length
9w	3″	To Length
11w	3″	To Length

TRIM CHART B

Clubhead	Standard Tip Trim	Butt Trim
Driver	0″	To Length
2w	3/8″	To Length
3w	3/4″	To Length
4w	1 1/8″	To Length
5w	1 1/2″	To Length
7w	1 7/8″	To Length
9w	2 1/4″	To Length
11w	2 1/4″	To Length

VARIATIONS

Increasing the tip trim by ½″ will result in a slightly firmer feel but will have no significant effect on launch angle and spin. Increasing tip trim by 1″ will result in a more noticeable increase in shaft stiffness but will only begin to show a slight decrease in launch angle and spin, only for golfers with a later release.

Decreasing the tip trim by ½″ will result in a slightly more flexible feel but will have no real effect on launch angle and spin. Decreasing tip trim by 1″ will result in a more noticeable increase in shaft flexibility but will only begin to show a slight increase in launch angle and spin, only for golfers with a later release.

NOTE 1: If the golfer being fit with any of the above shafts has a stronger Transition and faster Tempo, use Chart A.

NOTE 2: Use the 5-wood tip trim for the 730CL Long Fairway Wood; Use the 9 wood tip trim for the 730CL High Fairway Wood.

IRON SHAFT TRIMMING

USE TRIM CHART C FOR IRON SHAFTS:

WHITE	R, S Flexes
RED	R, S Flexes
BLACK 85	R, S Flexes
BLUE 55	A, R Flexes
SMOOTH STEEL	R, S Flexes
SUPERLITE STEEL	R, S Flexes

USE TRIM CHART D FOR IRON SHAFTS:

WHITE	A Flex
BLUE 55	AA Flex
GREEN	AA (L) Flex (add 1″ for Green A Flex)
GREEN	R Flex (add 2″ for Green S Flex)

USE TRIM CHART E FOR HYBRID SHAFTS:

WHITE HYBRID	A, R, S Flexes
BLUE 55 HYBRID	AA, A, R Flexes
BLACK HYBRID	R, S Flexes
RED HYBRID	R, S Flexes
RUBY LITE	AA, A Flexes

TRIM CHART C

Clubhead	Standard Tip Trim	Butt Trim
2-iron	0″	To Length
3-iron	1/2″	To Length
4-iron	1″	To Length
5-iron	1 1/2″	To Length
6-iron	2″	To Length
7-iron	2 1/2″	To Length
8-iron	3″	To Length
9-iron	3 1/2″	To Length
PW/48	3 1/2″	To Length
AW/52	4″	To Length
SW/55,56,58	4″	To Length
LW/60	4″	To Length

TRIM CHART D

Clubhead	Standard Tip Trim	Butt Trim
2-iron	0″	To Length
3-iron	3/8″	To Length
4-iron	3/4″	To Length
5-iron	1 1/8″	To Length
6-iron	1 1/2″	To Length
7-iron	1 7/8″	To Length
8-iron	2 1/4″	To Length
9-iron	2 5/8″	To Length
PW/48	2 5/8″	To Length
AW/52	3″	To Length
SW/55,56,58	3″	To Length
LW/60	3″	To Length

NOTE 1: Ruby Lite Wedge Shaft - 0″ tip trim for AA Flex; 1″ tip trim for the A Flex; Butt trim to desired playing length

TRIM CHART E

Clubhead	Standard Tip Trim	Butt Trim
2-Hybrid	0″	To Length
3-Hybrid	1/2″	To Length
4-Hybrid	1″	To Length
5-Hybrid	1 1/2″	To Length
6-Hybrid	2″	To Length
6/7-Hybrid	2″	To Length
8/9-Hybrid	2 1/2″	To Length

RUBY LITE TRIM CHART

Clubhead	A Flex Tip Trim	AA(L) Flex Tip Trim	Butt Trim
Driver	0″	0″	To Length
Long Fwy	1″	1″	To Length
High Fwy	2″	2″	To Length
5 Hybrid	1 1/2″	1 1/2″	To Length
6/7 Hybrid	2″	2″	To Length
8/9 Hybrid	2 1/2″	2 1/2″	To Length
5 iron	1 1/2″	1 1/2″	To Length
6/7 Iron	2″	2″	To Length
8/9 Iron	2 1/2″	2 1/2″	To Length
PW	1″	0″	To Length
DW	1″	0″	To Length

730CL STANDARD ASSEMBLY CHART

Clubhead	Men	Women
Driver	43 - 44″	42 - 43″
Long Fwy	41 1/2″ - 42 1/2″	40 1/2″ - 41 1/2″
High Fwy	40″ - 41″	39 1/2″ - 40″
5 Hybrid	37 1/2″ - 38″	36 1/2″ - 37″
6/7 Hybrid	36 1/2″ - 37″	35 1/2″ - 36″
8/9 Hybrid	35 1/2″ - 36″	34 1/2″ - 35″
5 iron	37 1/2″ - 38″	36 1/2″ - 37″
6/7 Iron	36 1/2″ - 37″	35 1/2″ - 36″
8/9 Iron	35 1/2″ - 36″	34 1/2″ - 35″
PW	35″ - 35 1/2″	34″ - 34 1/2″
DW	34 1/2″ - 35″	33 1/2″ - 34″

NOTE: The reason we offer a length range for the 730CL assembly is to correspond to golfers who may play better with a shorter or a little longer length as dictated by their wrist-to-floor measurement and playing ability. In all cases when building the 730CL clubs to the shorter lengths, more weight will have to be added to the clubheads using the weight bore in the hosel and weight bore in the sole.

ORIGINAL WISHON GOLF GRIP DESIGNS...
TO COMPLIMENT YOUR WISHON CUSTOM FIT GOLF CLUBS

GRIPS

- All rubber V-Series are Wishon Golf's most popular grips, molded from a new rubber compound for the right combination of tactile feel and durability. Features Wishon's larger lower-hand diameter size
- V-Series Burgundy rubber grips provide a great cosmetic match to the assembly of the model 730CL clubs and sets

Grip	Grip Size/Color	Upper Hand Dia. (2″)	Lower Hand Dia. (2″)	Weight	Core
401-Men-Std	Men's Std - Black/Silver	0.915″	0.835″	50g	0.600″
401-Men-R/B	Men's Std - Black/Red	0.915″	0.835″	50	0.600″
401-Ovz	Men's Oversize - Black/Silver	0.940″	0.855″	56	0.600″
401-Lady	Women's Std - Black/Silver	0.855″	0.765″	46	0.580″
401-Red-Lady	Women's Std - Burgundy/Silver	0.855″	0.765″	46	0.580″

***See Page 62 for all Wishon Golf putter grips**

NOTE: V-Series Oversize grips are made with black paint fill in the end cap. V-Series Men's Std grips are made with SILVER paint fill in the end cap.

GOLF BAGS

Wishon golf bag models (Stand/Carry and Cart/Trolley)both feature lightweight designs and additional features. Ideal for promoting the Wishon brand on the course.

CART/TROLLEY BAG

#TW165-19-CART

- Carry Handle
- Shoulder Strap
- 15-Way Divider
- 2 Full Length clothing pockets
- Cooler Pocket
- Rain hood with zip access
- Umbrella Holder

STAND/CARRY BAG

#TW165-19-STAND

- Carry Handle
- Dual Shoulder Strap
- 5-Way Divider
- Full Base Stand Mechanism
- Full-length Clothing Pocket
- Scorecard & Pen Pocket
- Cooler Pocket
- Waterproof Valuables Pocket
- Rain Hood with zip access
- Umbrella Holder

HEADCOVERS

EQ1-NX

NEW FOR 2020

FAIRWAY
#TW163-EQ1-FW

HYBRID
#TW163-EQ1-HY

STRIPE

DRIVER	**#TW163-DR**
FAIRWAY	**#TW163-FW**
HYBRID	**#TW163-HY**

The 'stripe' headcover design is of high quality with fleece lining and striking colour highlights.

RED, BLACK & WHITE

DRIVER	**#TW161-RWB-DR**
FAIRWAY	**#TW161-RWB-FW**
HYBRID	**#TW161-RWB-HY**

RED, BLACK & SILVER NEOPRENE

DRIVER	**#TW160-RED/BLK-DR**
FAIRWAY	**#TW160-RED/BLK-FW**
HYBRID	**#TW160-RED/BLK-HY**

PUTTER HEADCOVERS

MALLET PUTTER

#TW163-PUTMA

Fits models 2,3,4 in the Cavity Black series. Suitable for both RH & LH.

BLADE PUTTER

#TW163-PUTBL

Fits the Cavity Black Model 1 (#TWCB-1; TWCB-1LH). Suitable for both RH & LH.

ACCESSORIES

BALL MARKER

#TW155-BMT

Nickel based, metallic ball marker with enamel. Double sided with Wishon logo on top side and bold target design on reverse.

PITCHFORK

#TW155-PF

Quick release, retractable pitchfork.
Features magnetic, detachable ball marker.

BRUSHED COTTON CAPS

BLACK	#TWCAP-BC-BLK
KHAKI	#TWCAP-BC-KHA
MAROON	#TWCAP-BC-MAR

BREATHABLE MESH CAPS

GREY	#TWCAP-BM-GRY
NAVY BLUE	#TWCAP-BM-NAV
RED	#TWCAP-BM-RED

APPAREL

BY PETER MILLAR

Peter Millar is one of today's fastest growing and most sought after brands in the lifestyle apparel market. Known for uniquely proper clothing, the Peter Millar line embraces a classic, old-world style resplendent in sharp detail, superb craftsmanship, and only the highest quality materials available.

POLO SHIRTS

This exceptional solid e4 performance polo is lightweight, breathable, quick drying and stretches four ways for maximum comfort. Exceptional gram weight of fabric to prevent torque.

Stay cool in the moisture-wicking jersey and enjoy the easy-care finish.

DETAILS & FIT

- Men's 92% polyester, 8% spandex single jersey knit polo
- Sean self collar
- Performance friendly fit
- UPF 50+ sun protection
- Trocas shell buttons
- Machine wash cold with like colors; tumble dry low

AVAILABLE IN BLACK, WHITE, PINSTRIPE MAROON & PINSTRIPE GREY

SIZES: S, M, L, XL, XXL

MAROON PINSTRIPE - #TWMCEK11S-MR
GREY PINSTRIPE - #TWMCEK11S-GY

MÉLANGE FLEECE

NEW FOR 2020

This quarter-zip fleece is constructed from an ultra-soft knit fabric that offers the benefits of warmth, breathability and softness. It's specially designed for wearing in fall and winter weather while you root on your team. Styled with a stand up collar, rib-knit cuffs and hem.

DETAILS & FIT

- Men's 60% rayon / 32% polyester / 8% cotton quarter-zip vest
- Classic fit
- Banded cuffs and waist
- Machine wash cold with like colors. Lay flat to dry or dry clean

AVAILABLE IN BLACK & GREY

SIZES: S, M, L XL, XXL

GREY - #TWMK36-GY
BLACK - #TWMK36-BK

QUARTER ZIP VEST & LONG SLEEVE

This vest was designed with a moisture-wicking two-yarn system that moves moisture to the surface for quick-drying performance. This fabric features UPF 50+ sun protection and four-way stretch for increased comfort and mobility. Styled with a banded hem and a vertical zip closure, this vest pairs well with sport shirts and polos.

DETAILS & FIT

- Men's 89% microfiber polyester/11% spandex vest
- Athletic fit: we recommend ordering next size up for a classic fit
- Stretch French terry
- Machine wash cold with like colors; tumble dry low

VEST AVAILABLE IN BLACK & GREY
LONG SLEEVE AVAILABLE IN BLACK & MAROON

SIZES: S, M, L, XL, XXL

BLACK VEST - #TWMC0EK41-BK
GREY VEST - #TWMC0EK41-GY
BLACK LONGSLEEVE - #TWMC0EK40-BK
MAROON LONGSLEEVE - #TWMC0EK40-MR

FULL ZIP JACKET

NEW FOR 2020

The extra layer you'll want on game day, this full-zip jacket is constructed from stretchy, lightweight performance fabric. This exceptional layer offers ideal breathability that's perfect for rising temperatures throughout the day.

DETAILS & FIT

- Men's 89% polyester / 11% spandex jacket
- Classic fit
- Machine wash cold with like colors; tumble dry low

AVAILABLE IN BLACK

SIZES: S, M, L XL, XXL

#TWMCEZ31-BK

FERRULES

All Wishon clubheads and ferrules are designed to perfectly match their respective diameters, so there is no filing, sanding or cloth belt buffing needed. Simply note the wood, iron or wedge hosel's outside diameter (OD) on each clubhead model and choose the matching ferrule.

FERRULE SELECTION TIPS

- All Wishon design titanium drivers are designed with a 13mm Hosel Outside Diameter (OD)
- All Wishon model fairway woods and the 335HL hybrids are designed with a 12.3mm hosel OD
- All Wishon investment cast irons and wedges are designed with a 13.2mm hosel OD
- 775HS #2-6 and 590DIH#2-4 use 121-HY
- Wishon forged Carbon Steel iron models 575MMC and 565MC are designed to match the #125-IR ferrule

Tech Note: Always check the Hosel OD of the clubhead before selecting a ferrule to match

WOOD FERRULES

12.3mm Wood
.335"
#122-WD-STD

13mm Driver
.335"
#122-WD-TI

12.3mm Wood
.335"
#121-WD-STD

13mm Driver
.335"
#121-WD-TI

12.3mm Wood
.335"
#127-WD-STD

13mm Driver
.335"
#127-WD-TI

IRON FERRULES

13.2mm Iron
.370"
#122-IR

13.2mm Iron
.370"
#123-IR

13.2mm Iron
.370"
#121-IR

13.8mm Iron
565MC, 575MMC
#125-IR

13.2mm Iron
.370"
#127-IR

13.8mm Hybrid/Iron
.335"
775HS & 730CL Irons
#121-HY-IR

MEDALLIONS

#TW115-SQ-SIL
#TW115-EQ1-FW
#TW115-EQ1-HY

#TW115-BLK/SILVER
#TW115-RED/SILVER
#TW115-BLK/RED

CARBIDE ENDMILL DRILL BIT

CONVERTS TO PARALLEL .370 HOSEL

#TWSDB-370

Durable, Carbide Endmill drill bit, specifically for boring to a parallel .370 hosel.

We recommend this drill bit for customers wishing to convert a tapered iron hosel to parallel, or for changing Wishon Hybrid hosels with .335 bore.

WISHON GOLF WEIGHTS & WEIGHT BORE PLUGS

Exclusively for use with Wishon's Weight Bores. Weight plugs fit all Wishon driver, wood, iron and wedge models. Tungsten 9g Shaft Tip Weights fit any shaft model.

ITEM #	DESCRIPTION
#TW100-2	12 x 2g Brass Weight (1 Swt Pt)
#TW100-4	12 x 4g Brass Weight (2 Swt Pts)
#TW100-6	12 x 6g Tungsten Weight (3 Swt Pts)
#TW100-9	12 x 9g Tungsten Weight (4.5 Swt Pts)
#TW100-ASST	3 x 2g, 3 x 4g, 3 x 6g, 3 x 9g
#TW100--TIP-9	Tungsten 9g Shaft Tip Weight (graphite wood and irons)

SHAFT LABELS

Custom Club Label per doz. **#TW150-C**
Custom Putter Label per doz. **#TW150-PT**
Custom Wedge Label per doz. **#TW150-WG**

EUROPE

AUSTRIA

Golf Service
Contact: Günther Hauser
Aschergasse 58
A-1130 Wien
Tel: 0676 741 4183
Email: hausergolf@aon.at

FRANCE

Golf N Swing
Contact: Andre Thaon
16 Avenue General LeClerc
Le Pecq, France 78230
Tel: +33 (0) 139 161 860
Email: golfnswing@gmail.com
Web: www.golfnswing.com

GERMANY

Clubmate Arnd Welling
Contact: Michael Welwarsky
Darmstaädter Str. 33
64319 Pfungstadt
Germany

Tel: +49 (0)6157 8036640
Email: info@clubmategolf.com
Web: www.clubmategolf.com

BELGIUM, NETHERLANDS LUXEMBOURG

Diamond Golf Benelux
Contact: Bram Holshuijsen
Windmolenbosweg 1,
6081 PE Haelen

Tel: +31 (0)653375740
Email: abram@diamondgolf.co.uk

SWEDEN, DENMARK, NORWAY, FINLAND

Wishon Golf Nordic
Contact: Peter Qvarfordt
Mailing Address:
Wilprod GolfAgenturer AB
Brännesslyckevägen 6
26376 Nyhamnsläge
Sweden

Visiting Address:
Skårevägen 60 (Hus C)
65350 Karlstad
Sweden

Tel: +46 (0) 703 190 596
Email: peter.qvarfordt@wishongolf.se
Web: www.wishongolf.se

CONTACT US

Tel: +44 (0)1903 726999
0800 083 7388 (UK Freephone)
844-552-3437 (USA Tollfree)
1-844-552-3437 (Canada Tollfree)

Email: sales@wishongolf.com

Wishon Golf,
U4/U5 Rudford Industrial Estate,
Ford Road, Ford, Arundel,
West Sussex, England
BN18 0BF

WISHONGOLF.COM